

Industrial Basic LED MP 2.0

Advantages

- High luminous efficiency up to 180Lm/W
- High protection class IP66
- Quick and easy installation
- Branded components



IP66

IK08



Industrial Basic LED MP 2.0 1



P



Ra

IP



BAS2MP.10.040.8A4000

40

5750

4000K

>80

IP66

110°X105°

2kg

Industrial Basic LED MP 2.0 2



P



Ra

IP



BAS2MP.20.075.8A4000

75

11100


4000K

>80

IP66

110°X105°

2,4kg


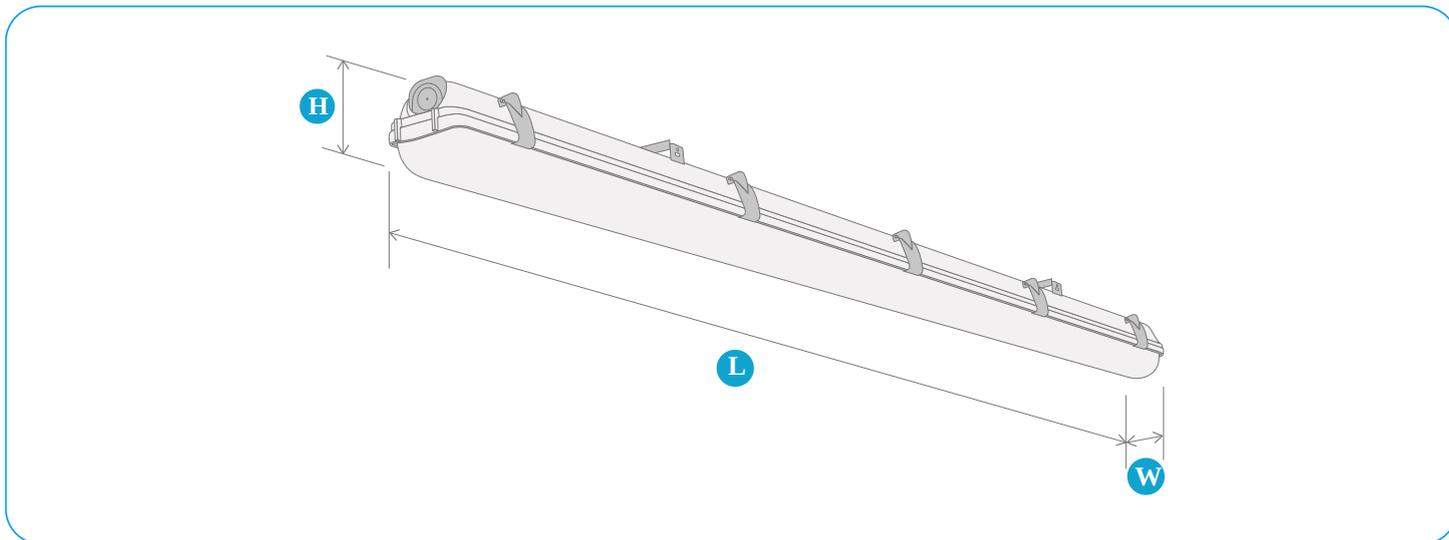


	H	W	L
---	---	---	---


BAS2MP.2	80	97	1573
----------	----	----	------

BAS2MP.1	80	97	1277
----------	----	----	------

Montage

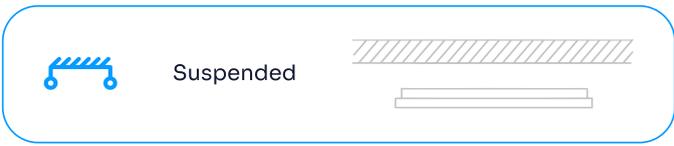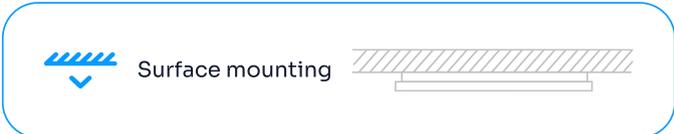

Luminous flux

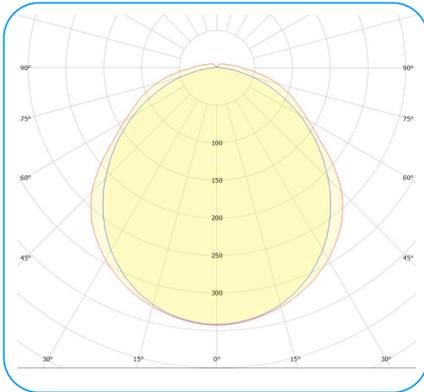

110°X105°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
BAS2MP Industrial Basic LED MP 2.0	1 1	0 Standard	040 40W	8 >80	A Mid Power	4000 4000K	0 No lens	P21 PC diffuser Transparent	110105 110°x105°	00 On/Off	1540 -15°C+40°C	05Y 5 Years	0000 No modification
	2 2		075 75W										E001 Through-wired
													E010 No driver

Example product code

BAS2MP.20.075.8A4000.OP21.110105.00.1540.05Y.0000