

CORDOBA LED U1 3.0



Advantages

- High luminous efficiency up to 160Lm/W
- Solid aluminum housing
- Branded components
- 12V luminaire

12VDC	IP66	IK10	III		CE
-------	------	------	-----	--	----


CORDOBA LED U1 3.0 5

	P	lm	K	Ra	IP		KG
CRD3U1.50.068.7C3000	68	9650 - 9800	3000K	>70	IP66	80°X15° 67°X47°	7,5kg
CRD3U1.50.068.7C4000	68	10150 - 10300	4000K	>70	IP66	67°X47° 80°X15°	7,5kg
CRD3U1.50.068.7C5700	68	9950 - 10100	5700K	>70	IP66	67°X47° 80°X15°	7,5kg

CORDOBA LED U1 3.0 6

	P	lm	K	Ra	IP		KG
CRD3U1.60.103.7C3000	103	14100 - 14250	3000K	>70	IP66	67°X47° 80°X15°	7,5kg
CRD3U1.60.103.7C4000	103	14850 - 15000	4000K	>70	IP66	67°X47° 80°X15°	7,5kg
CRD3U1.60.103.7C5700	103	14550 - 14700	5700K	>70	IP66	67°X47° 80°X15°	7,5kg

***Depending on the lens used, the luminous flux value may vary. Therefore, the table may include luminous flux ranges for a given power version, provided for reference purposes only.**

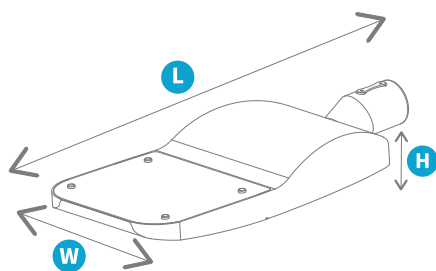

	H	W	L
---	---	---	---

CRD3U1.5	115	290	630
----------	-----	-----	-----

CRD3U1.6	115	290	630
----------	-----	-----	-----

			
---	---	---	---


CRD3U1.5	7,6	24	120x80
----------	-----	----	--------

CRD3U1.6	7,6	24	120x80
----------	-----	----	--------


Montage




Pole mounting Ø60



Luminous flux

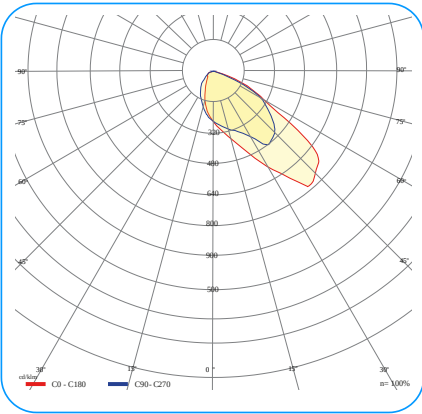

80°X15°

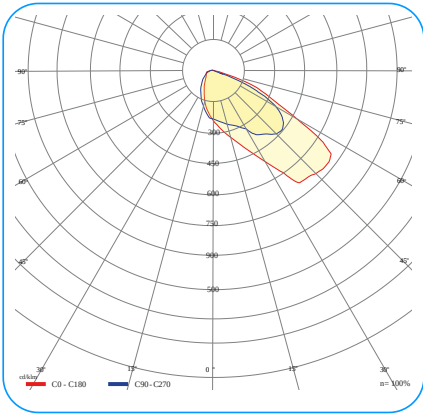

67°X47°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
CRD3U1 CORDOBA LED U1 3.0	5 5	0 Standard	068 68W	7 >70	C Highpower 1	3000 3000K	1 PMMA lens	G11 Tempered glass Transparent	067047 67°x47°	00 On/Off	4040 -40°C÷+40°C	03Y 3 Years	0000 No modification
	6 6		103 103W			4000 4000K			080015 80°x15°				
						5700 5700K							

Example product code

CRD3U1.50.068.7C3000.1G11.080015.00.4040.03Y.0000

Photo Gallery

