

CORDOBA LED U2 3.0



Advantages

- High luminous efficiency up to 160lm/W
- Solid aluminum housing
- Branded components
- 24V luminaire

24VDC

IP66

IK10

CORDOBA LED U2 3.0 1

	P			Ra	IP		
CRD3U2.10.024.7C3000	24	3400 - 3500	3000K	>70	IP66	80°X15° 67°X47°	4kg
CRD3U2.10.024.7C4000	24	3600 - 3700	4000K	>70	IP66	67°X47° 80°X15°	4kg

CRD3U2.10.024.7C5700	24	3450 - 3550	5700K	>70	IP66	67°X47° 80°X15°	4kg
----------------------	----	-------------	-------	-----	------	-----------------	-----

CORDOBA LED U2 3.0 2


	P			Ra	IP		
CRD3U2.20.035.7C3000	35	5200 - 5300	3000K	>70	IP66	67°X47° 80°X15°	4kg
CRD3U2.20.035.7C4000	35	5500 - 5600	4000K	>70	IP66	67°X47° 80°X15°	4kg

CRD3U2.20.035.7C5700	35	5200 - 5400	5700K	>70	IP66	67°X47° 80°X15°	4kg
----------------------	----	-------------	-------	-----	------	-----------------	-----

CORDOBA LED U2 3.0 3

	P			Ra	IP		
CRD3U2.30.041.7C3000	41	6100 - 6200	3000K	>70	IP66	67°X47° 80°X15°	4kg
CRD3U2.30.041.7C4000	41	6400 - 6500	4000K	>70	IP66	67°X47° 80°X15°	4kg
CRD3U2.30.041.7C5700	41	6100 - 6250	5700K	>70	IP66	67°X47° 80°X15°	4kg

***Depending on the lens used, the luminous flux value may vary. Therefore, the table may include luminous flux ranges for a given power version, provided for reference purposes only.**

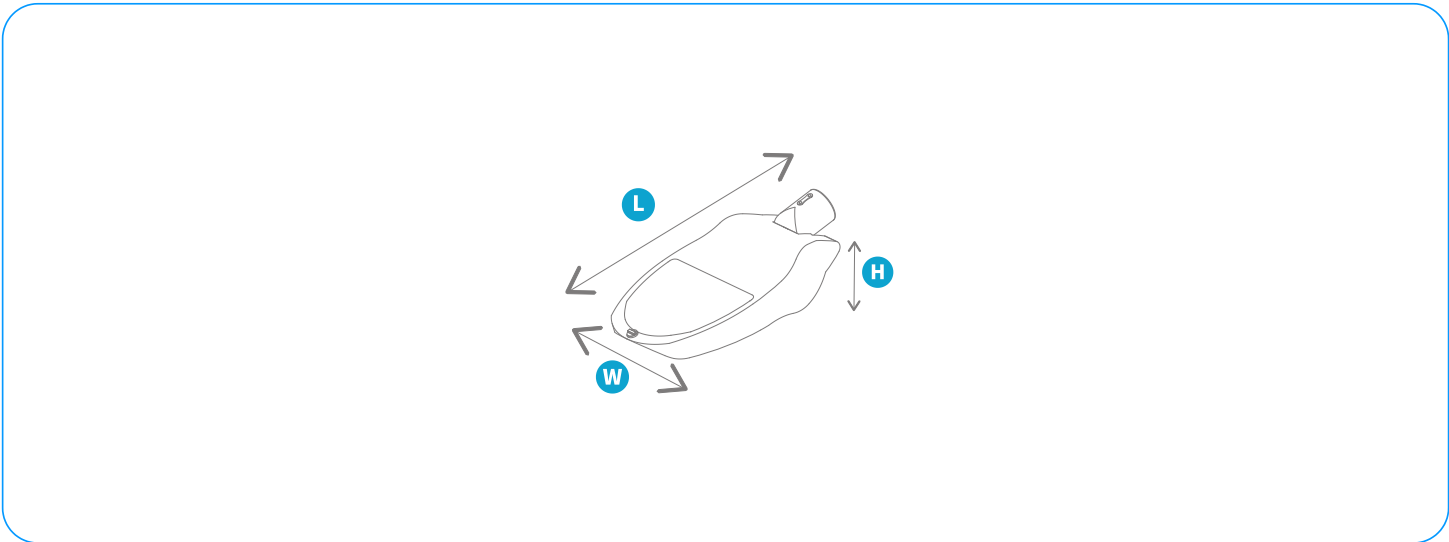


	H	W	L
CRD3U2.1	125	248	476
CRD3U2.2	125	248	476
CRD3U2.3	125	248	476

			
CRD3U2.1	4,1	30	120x80
CRD3U2.2	4,1	30	120x80
CRD3U2.3	4,1	30	120x80


Montage




Pole mounting Ø60



Luminous flux

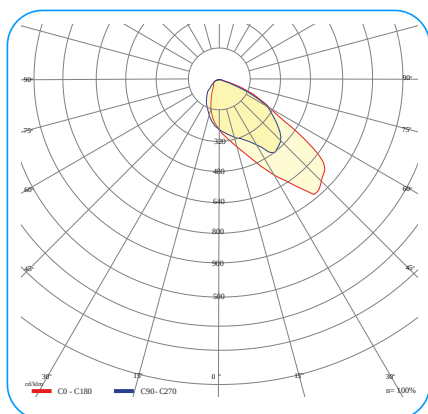

80°X15°

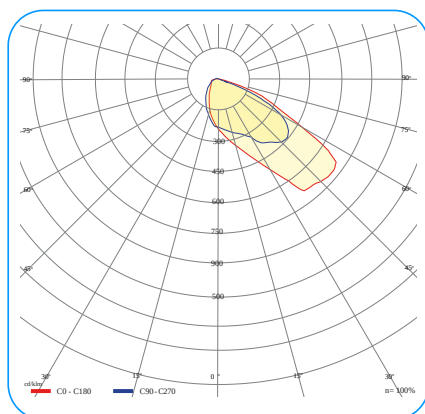

67°X47°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
CRD3U2 CORDOBA LED U2 3.0	1 1	0 Standard	024 24W	7 >70	C Highpower 1	3000 3000K	1 PMMA lens	G11 Tempered glass Transparent	067047 67°x47°	00 On/Off	4040 -40°C÷+40°C	03Y 3 Years	0000 No modification
	2 2		035 35W			4000 4000K			080015 80°x15°				
	3 3		041 41W			5700 5700K							

Example product code

CRD3U2.10.024.7C3000.1G11.080015.00.4040.03Y.0000

Photo Gallery



