

CORDOBA LED U2 3.0



Advantages

- High luminous efficiency up to 160Lm/W
- Solid aluminum housing
- Branded components
- 24V luminaire

24VDC

IP66

IK10/IK09




CORDOBA LED U2 3.0 5

	P			Ra	IP		
CRD3U2.50.065.7C3000	65	9650 - 9800	3000K	>70	IP66	80°X15° 67°X47°	7,5kg
CRD3U2.50.065.7C4000	65	10150 - 10300	4000K	>70	IP66	67°X47° 80°X15°	7,5kg
CRD3U2.50.065.7C5700	65	9950 - 10100	5700K	>70	IP66	67°X47° 80°X15°	7,5kg

CORDOBA LED U2 3.0 6

	P			Ra	IP		
CRD3U2.60.100.7C3000	100	14100 - 14250	3000K	>70	IP66	67°X47° 80°X15°	7,5kg
CRD3U2.60.100.7C4000	100	14850 - 15000	4000K	>70	IP66	67°X47° 80°X15°	7,5kg
CRD3U2.60.100.7C5700	100	14550 - 14700	5700K	>70	IP66	67°X47° 80°X15°	7,5kg

***Depending on the lens used, the luminous flux output may vary, so the table may show luminous flux ranges for a given power version for illustrative purposes.**

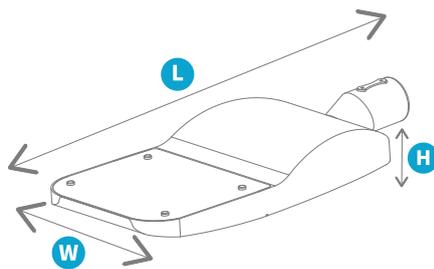

	H	W	L
---	---	---	---

CRD3U2.5	115	290	630
----------	-----	-----	-----


CRD3U2.6	115	290	630
----------	-----	-----	-----

			
---	---	---	---


CRD3U2.5	7,6	24	120x80
----------	-----	----	--------

CRD3U2.6	7,6	24	120x80
----------	-----	----	--------


Montage

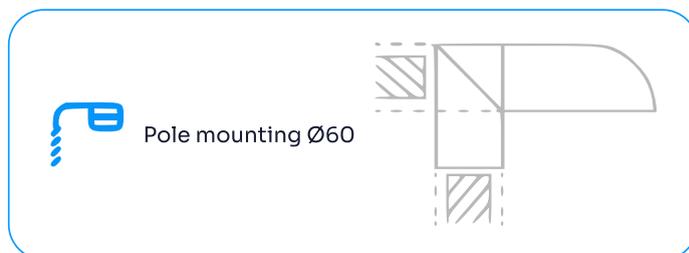

Luminous flux

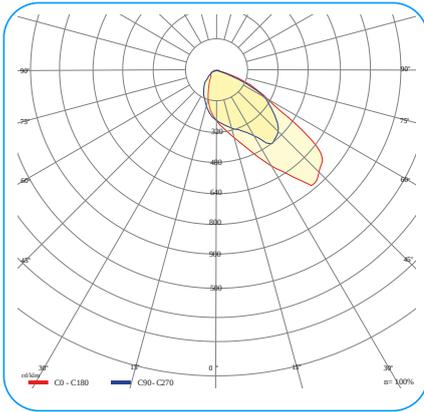

80°X15°

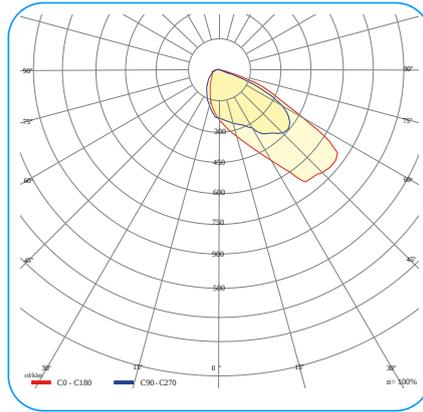

67°X47°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
CRD3U2 CORDOBA LED U2 3.0	5 5	0 Standard	065 65W	7 >70	C Highpower 1	3000 3000K	1 PMMA lens	G11 Tempered glass Transparent	067047 67°x47°	00 On/Off	4040 -40°C:+40°C	03Y 3 Years	0000 No modification
	6 6		100 100W			4000 4000K			080015 80°x15°				
						5700 5700K							

Example product code

CRD3U2.50.065.7C3000.1G11.080015.00.4040.03Y.0000