

CUBE LED 1.0



Advantages

- Elegant design, powder-coated aluminum housing
- Various color variants of the housing
- Quick and easy installation
- Several mounting variants: surface-mounted, wall lamp and the possibility of connecting to a three-phase rail



IP40



CUBE LED 1.0 1



P




Ra

IP



CUB1ST.10.009.8B3000	09	1100	3000K	>80	IP40	45°X45° 70°X70°	0,8kg
CUB1ST.10.009.8B4000	09	1100	4000K	>80	IP40	45°X45° 70°X70°	0,8kg
CUB1ST.10.009.8B5000	09	1100	5000K	>80	IP40	45°X45° 70°X70°	0,8kg
CUB1ST.10.018.8B3000	18	2200	3000K	>80	IP40	70°X70° 45°X45°	0,8kg
CUB1ST.10.018.8B4000	18	2200	4000K	>80	IP40	45°X45° 70°X70°	0,8kg
CUB1ST.10.018.8B5000	18	2200	5000K	>80	IP40	45°X45° 70°X70°	0,8kg

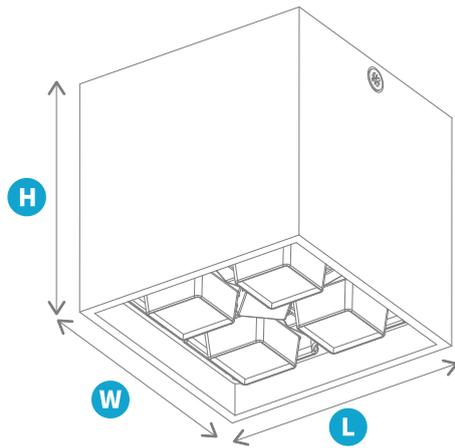

STANDARD
DALI

CUB1ST.1

100
100

100
100

100
100


Montage




Surface mounting




3-phase rail



Luminous flux

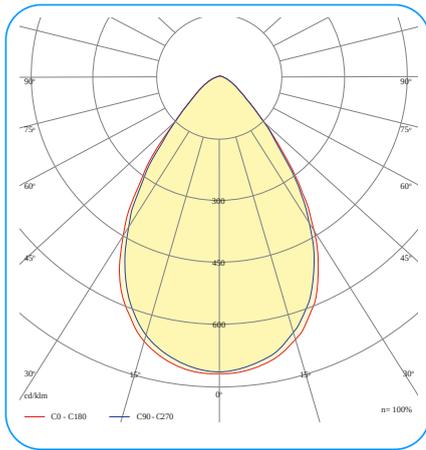

70°X70°

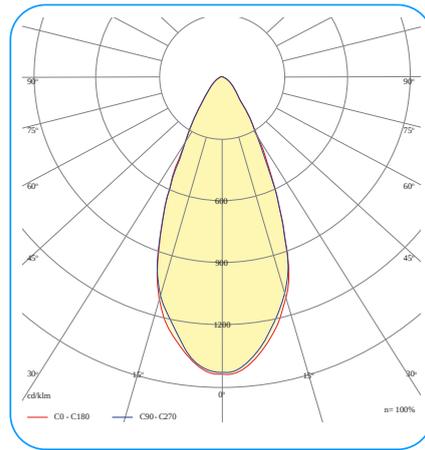

45°X45°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
CUB1ST CUBE LED 1.0	1 1	0 Standard	009 9W	8 >80	B Highpower	3000 3000K	1 PMMA lens	000	045045 45°x45°	00 On/Off	2045 -20°C÷45°C	05Y 5 Years	B001 Black, RAL9005
			018 18W			4000 4000K			070070 70°x70°	D0 DALI			G001 Gray, RAL7038
						5000 5000K							

Example product code

CUB1ST.10.018.8B3000.1000.070070.00.2045.05Y.B001

Photo Gallery

