

DRAFT LED 1.0



Advantages

- Protection class at the level of IP65
- Quick and easy installation
- Low UGR coefficients
- Several mounting options
- Ability to direct the light beam as desired



IP65

IK08



DRAFT LED 1.0 1

	P			Ra	IP		
DRF1ST.10.067.8A3000	67	10450	3000K	>80	IP65	80°X80° 110°X110°	2,3kg
DRF1ST.10.067.8A4000	67	11250 - 11400	4000K	>80	IP65	50°X50° 80°X80° 110°X110°	2,3kg
DRF1ST.10.067.8A5000	67	11300 - 11450	5000K	>80	IP65	50°X50° 80°X80° 110°X110°	2,3kg

DRAFT LED 1.0 2

	P			Ra	IP		
DRF1ST.20.086.8A3000	86	12950 - 13150	3000K	>80	IP65	50°X50° 80°X80° 110°X110°	2,3kg
DRF1ST.20.086.8A4000	86	14100 - 14350	4000K	>80	IP65	50°X50° 80°X80° 110°X110°	2,3kg
DRF1ST.20.086.8A5000	86	14150 - 14400	5000K	>80	IP65	50°X50° 80°X80° 110°X110°	2,3kg


DRAFT LED 1.0 3

	P			Ra	IP		
DRF1ST.30.115.8A3000	115	16700 - 16950	3000K	>80	IP65	50°X50° 80°X80° 110°X110°	2,3kg
DRF1ST.30.115.8A4000	115	18200 - 18500	4000K	>80	IP65	50°X50° 80°X80° 110°X110°	2,3kg
DRF1ST.30.115.8A5000	115	18250 - 18550	5000K	>80	IP65	50°X50° 80°X80° 110°X110°	2,3kg

DRAFT LED 1.0 4

	P			Ra	IP		
DRF1ST.40.134.8A3000	134	19050 - 19300	3000K	>80	IP65	50°X50° 80°X80° 110°X110°	2,3kg
DRF1ST.40.134.8A4000	134	20750 - 21050	4000K	>80	IP65	50°X50° 80°X80° 110°X110°	2,3kg
DRF1ST.40.134.8A5000	134	20800 - 21100	5000K	>80	IP65	50°X50° 80°X80° 110°X110°	2,3kg

***Depending on the lens used, the luminous flux output may vary, so the table may show luminous flux ranges for a given power version for illustrative purposes.**

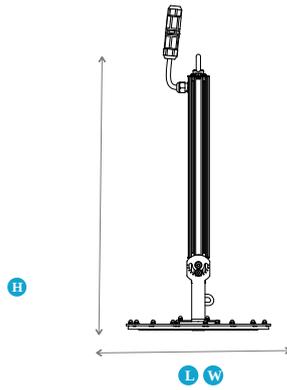

		H	W	L
STANDARD DALI	DRF1ST.1	560 560	0 0	270 270
STANDARD DALI	DRF1ST.2	560 560	0 0	270 270
STANDARD DALI	DRF1ST.3	560 640	0 0	270 270
STANDARD DALI	DRF1ST.4	560 640	0 0	270 270

Montage




Surface mounting




Suspended




Luminous flux

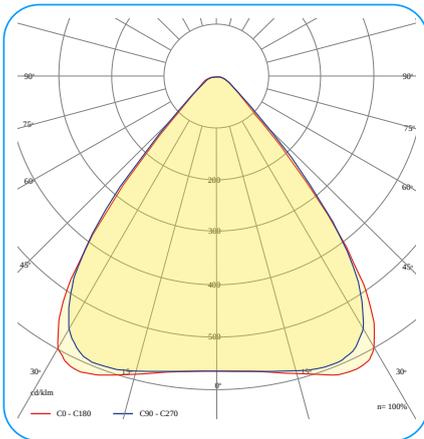

80°X80°

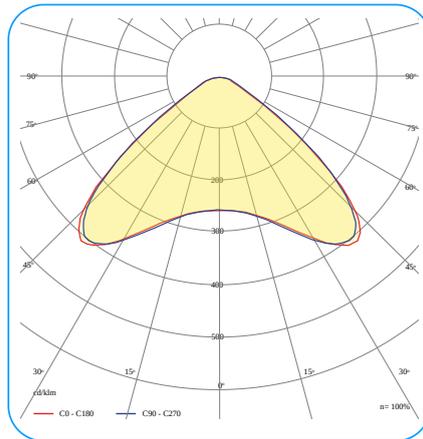

110°X110°

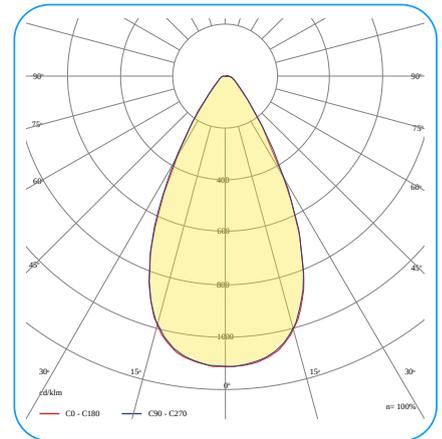

50°X50°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
DRF1ST DRAFT LED 1.0	1 1	0 Standard	067 67W	8 >80	A Mid Power	3000 3000K	2 PC lens	000	050050 50°x50°	00 On/Off	2545 -25°C:+45°C	05Y 5 Years	0000 No modification
	2 2		086 86W			4000 4000K			080080 80°x80°	D0 DALI	2550 -25°C:+50°C		
	3 3		115 115W			5000 5000K			110110 110°x110°		2555 -25°C:+55°C		
	4 4		134 134W										

Example product code

DRF1ST.10.067.8A3000.2000.080080.00.2555.05Y.0000

Photo Gallery

