

DRAFT LED 1.1

Advantages

- Protection class at the level of IP65
- Quick and easy installation
- Low UGR coefficients
- Several mounting options
- Ability to direct the light beam as desired




IP65

IK08



DRAFT LED 1.1

	P			Ra	IP		
DRF1ST.11.066.8A4000	66	11650	4000K	>80	IP65	60°X60° 90°X90° 120°X120°	2,3kg
DRF1ST.11.086.8A4000	86	14950	4000K	>80	IP65	60°X60° 90°X90° 120°X120°	2,3kg
DRF1ST.11.115.8A4000	115	19500	4000K	>80	IP65	60°X60° 90°X90° 120°X120°	2,3kg
DRF1ST.11.136.8A4000	136	22550	4000K	>80	IP65	60°X60° 90°X90° 120°X120°	2,3kg

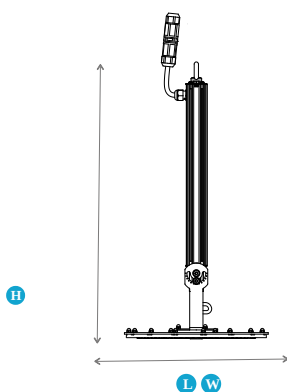

H

W

L

STANDARD
DALI

DRF1ST.1

560
560

0
0

270
270

Montage




Surface mounting




Suspended




Luminous flux

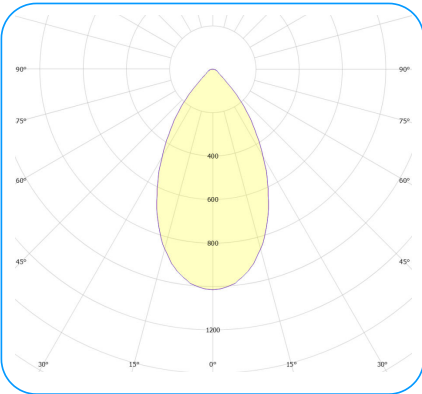

60°X60°

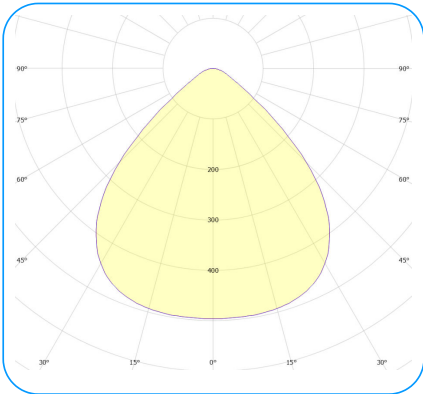

90°X90°

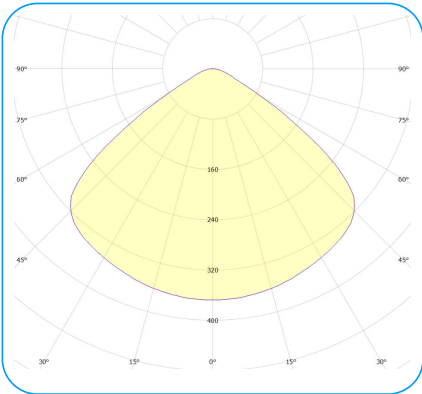

120°X120°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
DRF1ST DRAFT LED 1.1	1 1	1 Lift 1	066 66W	8 >80	A Mid Power	4000 4000K	2 PC lens	000	060060 60°x60°	00 On/Off	2545 -25°C÷45°C	05Y 5 Years	0000 No modification
			086 86W						090090 90°x90°	D0 DALI	2550 -25°C÷50°C		
			115 115W						120120 120°x120°		2555 -25°C÷55°C		
			136 136W										

Example product code

DRF1ST.11.066.8A4000.2000.060060.00.2555.05Y.0000

Photo Gallery

