

DOWNLIGHT LED RCA 3.0



Advantages

- Ability to direct the light beam as desired
- Quick and easy installation
- Branded components
- Solid aluminum housing

IP20

IK03

CE

DOWNLIGHT LED RCA 3.0 1

	P			Ra	IP		
DWN3RA.10.019.8E2000	19	1400	2000K	>80	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.10.019.8E2500	19	1850	2500K	>80	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.10.019.9D2700	19	1900	2700K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.10.019.9D3000	19	1900	3000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.10.019.9D4000	19	2000	4000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.10.019.9E3000	19	1750	3000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.10.019.9E4200	19	1600	4200K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.10.019.9E5700	19	2050	5700K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.10.019.9F3000	19	1750	3000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg

DWN3RA.10.019.9G3000	19	1950	3000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.10.019.9G3500	19	2000	3500K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.10.019.9G4000	19	2150	4000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg

DOWNLIGHT LED RCA 3.0 2

	P			Ra	IP		
DWN3RA.20.025.8E2000	25	1750	2000K	>80	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.20.025.8E2500	25	2400	2500K	>80	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.20.025.9D2700	25	2500	2700K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.20.025.9D3000	25	2500	3000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.20.025.9D4000	25	2600	4000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.20.025.9E3000	25	2250	3000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.20.025.9E4200	25	2000	4200K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.20.025.9E5700	25	2600	5700K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.20.025.9F3000	25	2200	3000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.20.025.9G3000	25	2500	3000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.20.025.9G3500	25	2500	3500K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.20.025.9G4000	25	2700	4000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg


DOWNLIGHT LED RCA 3.0 3

	P			Ra	IP		
DWN3RA.30.031.8E2000	31	2000	2000K	>80	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.30.031.8E2500	31	2900	2500K	>80	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.30.031.9D2700	31	3100	2700K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.30.031.9D3000	31	3100	3000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.30.031.9D4000	31	3200	4000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.30.031.9E3000	31	2700	3000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.30.031.9E4200	31	2400	4200K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.30.031.9E5700	31	3150	5700K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.30.031.9F3000	31	2650	3000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.30.031.9G3000	31	3000	3000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.30.031.9G3500	31	3000	3500K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.30.031.9G4000	31	3250	4000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg

DOWNLIGHT LED RCA 3.0 4

	P			Ra	IP		
DWN3RA.40.037.8E2000	37	2350	2000K	>80	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.40.037.8E2500	37	3450	2500K	>80	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg

DWN3RA.40.037.9D2700	37	3650	2700K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.40.037.9D3000	37	3650	3000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.40.037.9D4000	37	3800	4000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.40.037.9E3000	37	3100	3000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.40.037.9E4200	37	2800	4200K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.40.037.9E5700	37	3650	5700K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.40.037.9F3000	37	3050	3000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.40.037.9G3000	37	3450	3000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.40.037.9G3500	37	3500	3500K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg
DWN3RA.40.037.9G4000	37	3800	4000K	>90	IP20	15°X15° 25°X25° 35°X35° 60°X60°	1,1kg

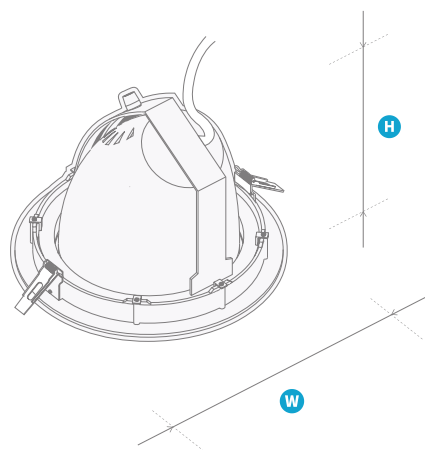

H

W

L

DWN3RA.1

150

0

170

DWN3RA.2

150

0

170

DWN3RA.3

150

0

170

DWN3RA.4

150

0

170

Montage



Recessed-mounted




Modular ceiling




Plaster board




Luminous flux

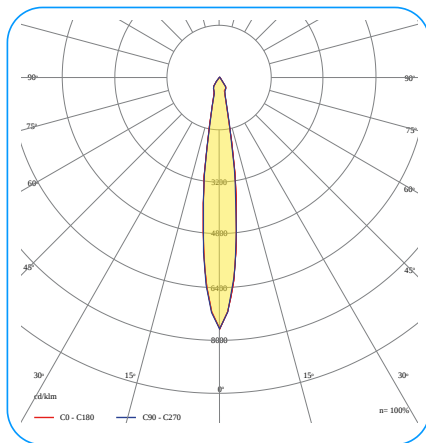


15°X15°

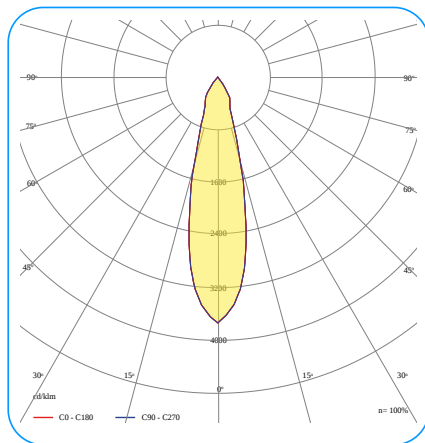

25°X25°

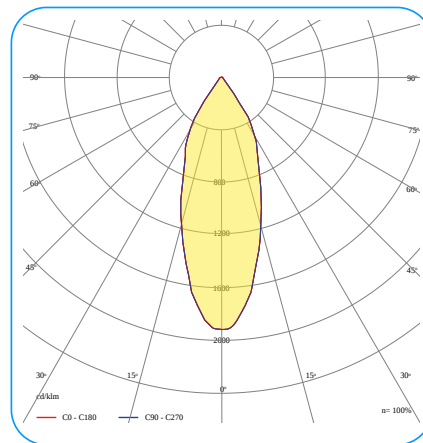

35°X35°

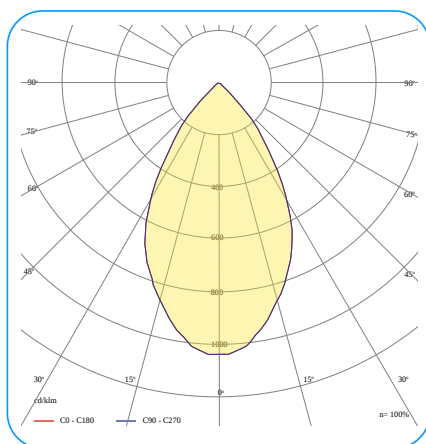

60°X60°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
DWN3RA DOWNLIGHT LED RCA 3.0	1 1	0 Standard	019 19W	8 >80	D COB	2000 2000K	0 No lens	S35 ABS reflector Glossy	015015 15°x15°	00 On/Off	2030 -20°C÷30°C	05Y 5 Years	B001 Black, RAL9005
	2 2		025 25W	9 >90	E COB Food/Special App	2500 2500K			025025 25°x25°				W001 White, RAL9016
	3 3		031 31W		F COB Premium White	2700 2700K			035035 35°x35°				
	4 4		037 37W		G COB Premium White	3000 3000K			060060 60°x60°				
						3500 3500K							
						4000 4000K							
						4200 4200K							
						5700 5700K							

Example product code

DWN3RA.10.019.8E2000.OS35.015015.00.2030.05Y.W001