

DOWNLIGHT LED RC 3.0



Advantages

- High protection class IP66
- Solid aluminum housing
- Quick and easy installation
- Branded components

IP65



DOWNLIGHT LED RC 3.0 1


	P			Ra	IP		
DWN3RC.10.015.8A3000	15	1800	3000K	>80	IP65	110°X110°	0,5kg
DWN3RC.10.015.8A4000	15	1900	4000K	>80	IP65	110°X110°	0,5kg

DOWNLIGHT LED RC 3.0 2

	P			Ra	IP		
DWN3RC.20.020.8A3000	20	2550	3000K	>80	IP65	110°X110°	0,5kg
DWN3RC.20.020.8A4000	20	2700	4000K	>80	IP65	110°X110°	0,5kg


DOWNLIGHT LED RC 3.0 3


	P			Ra	IP		
DWN3RC.30.030.8A3000	30	3400	3000K	>80	IP65	110°X110°	0,5kg
DWN3RC.30.030.8A4000	30	3600	4000K	>80	IP65	110°X110°	0,5kg

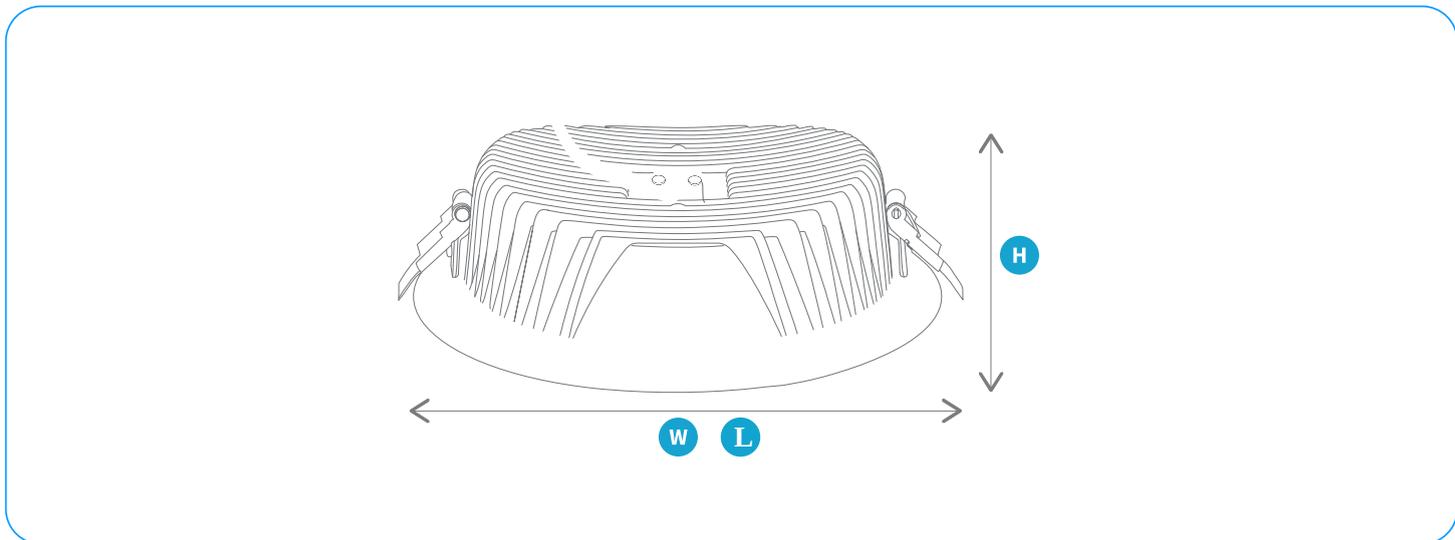

		H	W	L
STANDARD DALI	DWN3RC.1	75 75	0 0	190 190
STANDARD DALI	DWN3RC.2	75 75	0 0	190 190
STANDARD DALI	DWN3RC.3	75 75	0 0	190 190


Montage

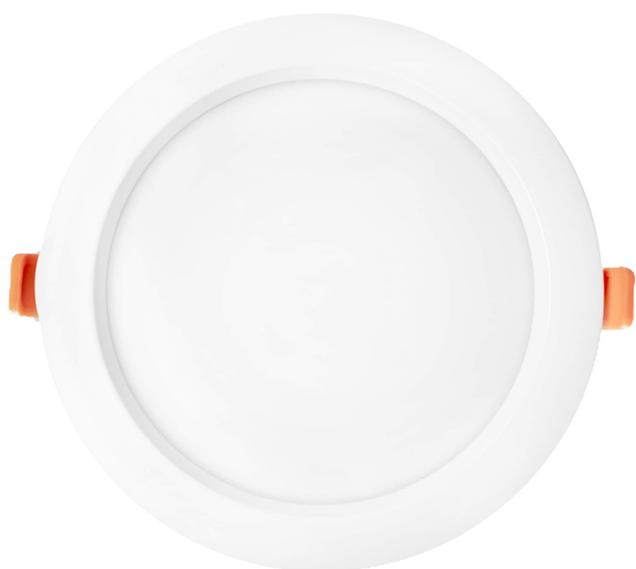


Recessed-mounted



Modular ceiling

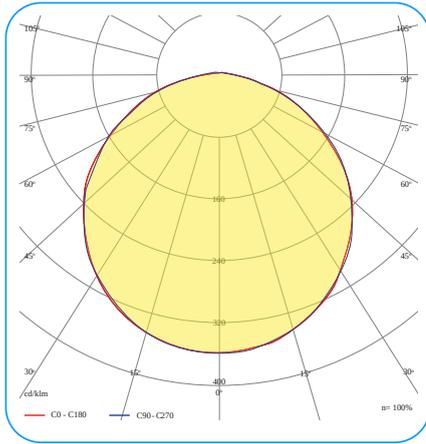
Luminous flux



110°X110°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
DWN3RC DOWNLIGHT T LED RC 3.0	1 1	0 Standard	015 15W	8 >80	A Mid Power	3000 3000K	0 No lens	P13 PMMA diffuser Matt	110110 110°x110°	00 On/Off	2040 -20°C+40°C	05Y 5 Years	0000 No modification
	2 2		020 20W			4000 4000K				DO DALI			
	3 3		030 30W										

Example product code

DWN3RC.10.015.8A3000.OP13.110110.DO.2040.05Y.0000

Photo Gallery

