

# FLOORLIGHT LED 1.0



## Advantages

- High resistance to external factors
- Quick and easy installation
- Branded components
- Protection class at the level of IP65
- High impact resistance IK08



IP65

IK08



## FLOORLIGHT LED 1.0 1



P



Ra

IP



FLO1ST.10.024.8A3000

24

3050

3000K

>80

IP65

105°X105°

15,8kg

FLO1ST.10.024.8A4000

24

3150

4000K

>80

IP65

105°X105°

15,8kg

FLO1ST.10.024.8A5000

24

3200

5000K

>80

IP65

105°X105°

15,8kg

## FLOORLIGHT LED 1.0 2



P



Ra

IP



FLO1ST.20.034.8A3000

34

4300

3000K

>80

IP65

105°X105°

11,4kg

FLO1ST.20.034.8A4000

34

4450

4000K

>80

IP65

105°X105°

11,4kg

FLO1ST.20.034.8A5000

34

4500

5000K

>80


IP65

105°X105°

11,4kg

## FLOORLIGHT LED 1.0 3

	P			Ra	IP		
FLO1ST.30.047.8A3000	47	5850	3000K	>80	IP65	105°X105°	25,2kg
FLO1ST.30.047.8A4000	47	6150	4000K	>80	IP65	105°X105°	25,2kg
FLO1ST.30.047.8A5000	47	6200	5000K	>80	IP65	105°X105°	25,2kg

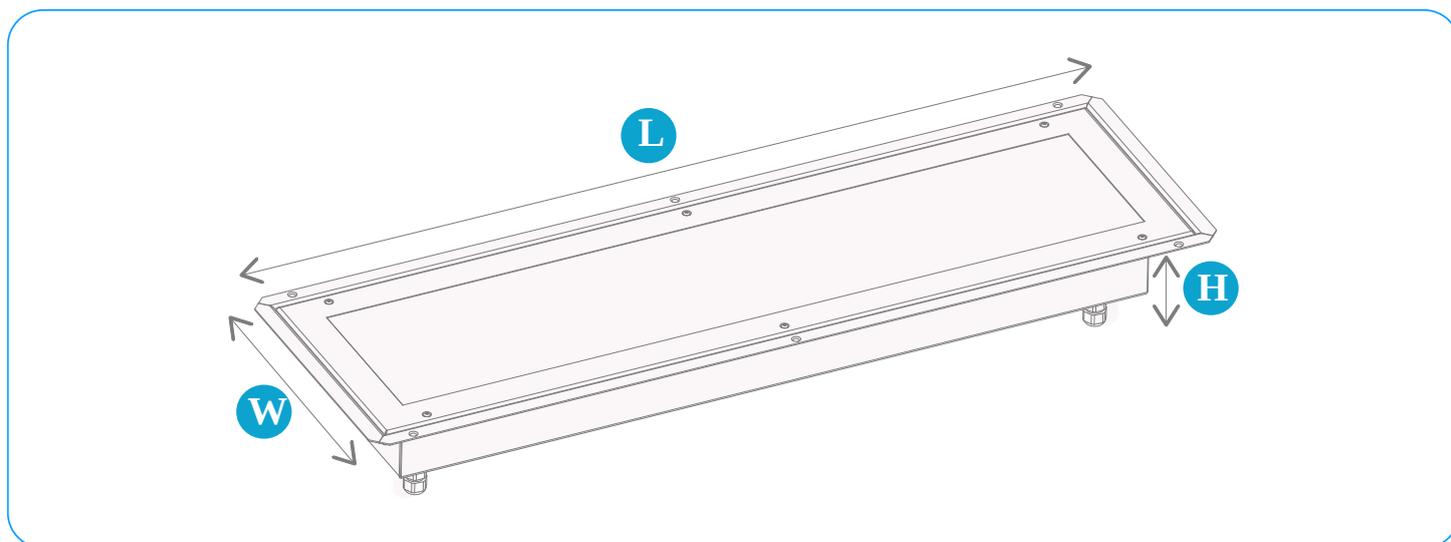


	H	W	L
FLO1ST.1	145	319	1019
FLO1ST.2	145	319	704
FLO1ST.3	145	319	1619

## Montage



## Luminous flux

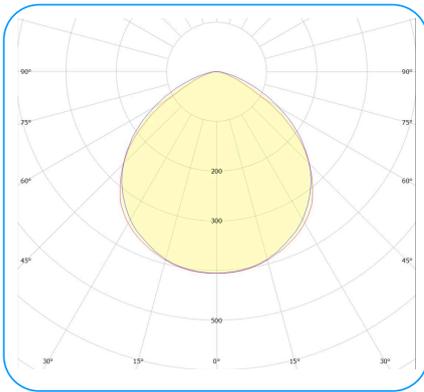

105°X105°

## Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
FLO1ST FLOORLIGHT LED 1.0	1	0 Standard	024 24W	8 >80	A Mid Power	3000 3000K	0 No lens	G12 Tempered glass Frosted	105105 105°x105°	00 On/Off	2545 -25°C:+45°C	05Y 5 Years	0000 No modification
	2		034 34W			4000 4000K				D0 DALI			
	3		047 47W			5000 5000K							

## Example product code

FLO1ST.10.024.8A3000.0G12.105105.D0.2545.05Y.0000