

INDUSTRIAL LED MN 6.0

Advantages

- High luminous efficiency up to 180Lm/W
- High protection class IP66
- Quick and easy installation
- Branded components
- Warranty up to 10 years
- High operating temperature range



IP66

IK08




INDUSTRIAL LED MN 6.0 1

	P			Ra	IP		
IND6MN.10.014.8A3000	14	2050	3000K	>80	IP66	135°X90°	1,2kg
IND6MN.10.014.8A4000	14	2150	4000K	>80	IP66	135°X90°	1,2kg
IND6MN.10.014.8A5000	14	2200	5000K	>80	IP66	135°X90°	1,2kg



INDUSTRIAL LED MN 6.0 2

	P			Ra	IP		
IND6MN.20.024.8A3000	24	3700	3000K	>80	IP66	135°X90°	1,2kg
IND6MN.20.024.8A4000	24	3850	4000K	>80	IP66	135°X90°	1,2kg
IND6MN.20.024.8A5000	24	3900	5000K	>80	IP66	135°X90°	1,2kg

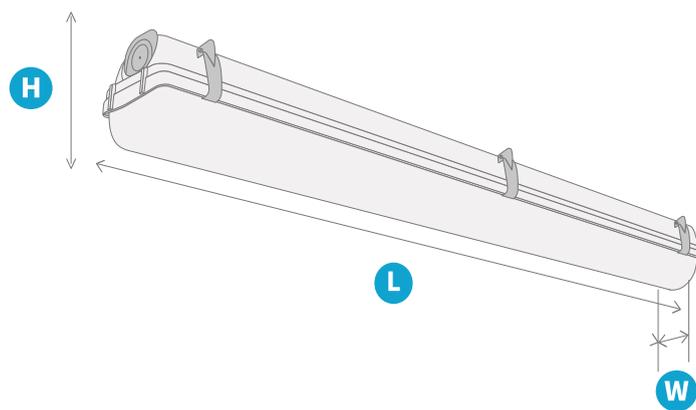


	H	W	L
IND6MN.1	104	97	660
IND6MN.2	104	97	660

Montage

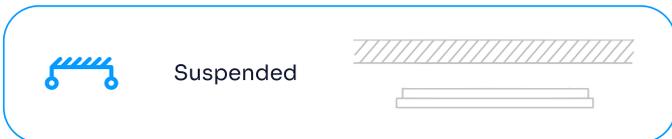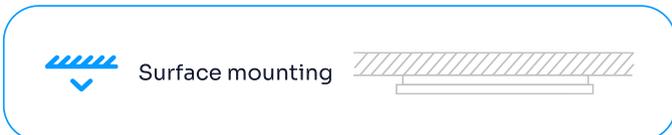

Luminous flux

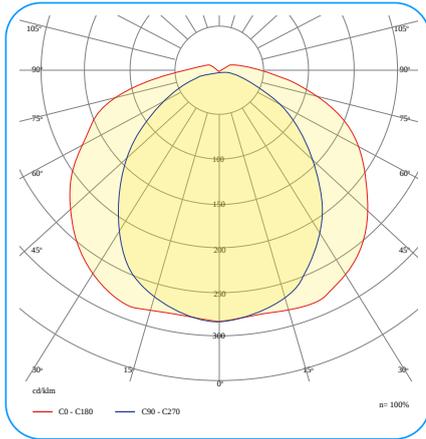

135°X90°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
IND6MN INDUSTRIAL LED MN 6.0	1 1	0 Standard	014 14W	8 >80	A Mid Power	3000 3000K	0 No lens	P23 PC diffuser Matt	135090 135°x90°	00 On/Off	2545 -25°C:+45°C	05Y 5 Years	0000 No modification
	2 2		024 24W			4000 4000K				D0 DALI	3555 -35°C:+55°C	08Y 8 Years	E001 Through-wired
						5000 5000K						10Y 10 Years	E004 Through-wired; Quick connector
													E010 No driver
													F004 Outdoor version

Example product code

IND6MN.10.014.8A3000.OP23.135090.00.2545.05Y.E001