

INDUSTRIAL LED 6.0

Advantages

- High luminous efficiency up to 180Lm/W
- High protection class IP66
- Quick and easy installation
- Branded components
- Warranty up to 10 years
- High operating temperature range



IP66

IK08



INDUSTRIAL LED 6.0 1

	P			Ra	IP		
IND6ST.10.017.8A3000	17	2900	3000K	>80	IP66	120°X110°	2kg
IND6ST.10.017.8A4000	17	3000	4000K	>80	IP66	120°X110°	2kg
IND6ST.10.017.8A5000	17	3050	5000K	>80	IP66	120°X110°	2kg
IND6ST.10.026.8A3000	26	4350	3000K	>80	IP66	120°X110°	2kg
IND6ST.10.026.8A4000	26	4500	4000K	>80	IP66	120°X110°	2kg
IND6ST.10.026.8A5000	26	4550	5000K	>80	IP66	120°X110°	2kg
IND6ST.10.032.8A3000	32	5450	3000K	>80	IP66	120°X110°	2kg
IND6ST.10.032.8A4000	32	5650	4000K	>80	IP66	120°X110°	2kg

IND6ST.10.032.8A5000	32	5700	5000K	>80	IP66	120°X110°	2kg
----------------------	----	------	-------	-----	------	-----------	-----

INDUSTRIAL LED 6.0 2

	P			Ra	IP		
---	---	---	---	----	----	---	---

IND6ST.20.042.8A3000	42	7200	3000K	>80	IP66	120°X110°	2kg
----------------------	----	------	-------	-----	------	-----------	-----

IND6ST.20.042.8A4000	42	7450	4000K	>80	IP66	120°X110°	2kg
----------------------	----	------	-------	-----	------	-----------	-----

IND6ST.20.042.8A5000	42	7500	5000K	>80	IP66	120°X110°	2kg
----------------------	----	------	-------	-----	------	-----------	-----

INDUSTRIAL LED 6.0 3

	P			Ra	IP		
---	---	---	---	----	----	---	---

IND6ST.30.066.8A3000	66	11500	3000K	>80	IP66	120°X110°	2,4kg
----------------------	----	-------	-------	-----	------	-----------	-------

IND6ST.30.066.8A4000	66	11850	4000K	>80	IP66	120°X110°	2,4kg
----------------------	----	-------	-------	-----	------	-----------	-------

IND6ST.30.066.8A5000	66	11900	5000K	>80	IP66	120°X110°	2,4kg
----------------------	----	-------	-------	-----	------	-----------	-------

INDUSTRIAL LED 6.0 4

	P			Ra	IP		
---	---	---	---	----	----	---	---

IND6ST.40.080.8A3000	80	12900	3000K	>80	IP66	120°X110°	2,4kg
----------------------	----	-------	-------	-----	------	-----------	-------

IND6ST.40.080.8A4000	80	13300	4000K	>80	IP66	120°X110°	2,4kg
----------------------	----	-------	-------	-----	------	-----------	-------

IND6ST.40.080.8A5000	80	13350	5000K	>80	IP66	120°X110°	2,4kg
----------------------	----	-------	-------	-----	------	-----------	-------

IND6ST.40.097.8A3000	97	15300	3000K	>80	IP66	120°X110°	2,4kg
----------------------	----	-------	-------	-----	------	-----------	-------

IND6ST.40.097.8A4000	97	15800	4000K	>80	IP66	120°X110°	2,4kg
----------------------	----	-------	-------	-----	------	-----------	-------

IND6ST.40.097.8A5000

97

15850


5000K

>80

IP66

120°X110°

2,4kg

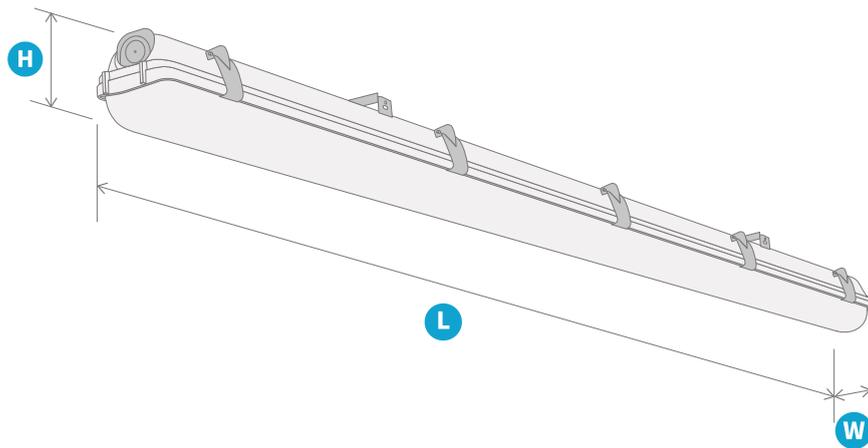

H

W

L

STANDARD
DALI

IND6ST.1

84
8497
971277
1277STANDARD
DALI

IND6ST.2

84
8497
971277
1277STANDARD
DALI

IND6ST.3

84
8497
971573
1573STANDARD
DALI

IND6ST.4

84
8497
971573
1573

Montage




Surface mounting



Suspended



Luminous flux

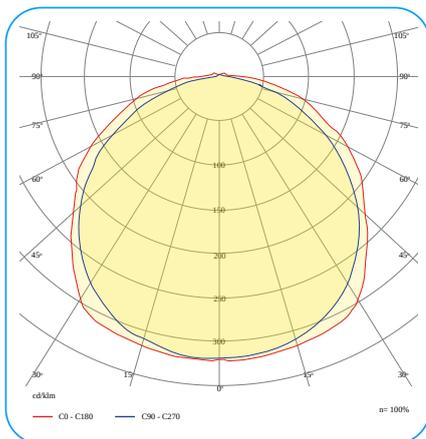

120°X110°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
IND6ST INDUSTRIAL LED 6.0	1 1	0 Standard	017 17W	8 >80	A Mid Power	3000 3000K	0 No lens	P21 PC diffuser Transparent	120110 120°x110°	00 On/Off	0030 -0°C:+30°C	05Y 5 Years	0000 No modification
	2 2		026 26W	9 >90		4000 4000K				D0 DALI	2040 -20°C:+40°C	08Y 8 Years	E001 Through-wired
	3 3		032 32W			5000 5000K				E3 Emergency module 3h	2540 -25°C:+40°C	10Y 10 Years	E004 Through-wired; Quick connector
	4 4		042 42W							S1 Motion sensor	3550 -35°C:+50°C		E010 No driver
			066 66W										F004 Outdoor version
			080 80W										
			097 97W										

Example product code

IND6ST.10.017.8A3000.OP21.120110.00.2540.08Y.0000

Photo Gallery

