

INDUSTRIAL LED 24VDC 7.0



Advantages

- High luminous efficacy up to 183 lm/W
- High protection class IP66
- Quick and easy installation
- Branded components
- Warranty up to 10 years
- High operating temperature range

18-32VDC

IP66

IK08





INDUSTRIAL LED 24VDC 7.0 1

	P			Ra	IP		
IND7DC.10.020.8A3000	20	3350	3000K	>80	IP66	120°X105°	1,5kg
IND7DC.10.020.8A4000	20	3550	4000K	>80	IP66	120°X105°	1,5kg
IND7DC.10.020.8A5000	20	3600	5000K	>80	IP66	120°X105°	1,5kg



INDUSTRIAL LED 24VDC 7.0 2

	P			Ra	IP		
IND7DC.20.040.8A3000	40	6800	3000K	>80	IP66	120°X105°	2,3kg
IND7DC.20.040.8A4000	40	7250	4000K	>80	IP66	120°X105°	2,3kg
IND7DC.20.040.8A5000	40	7300	5000K	>80	IP66	120°X105°	2,3kg

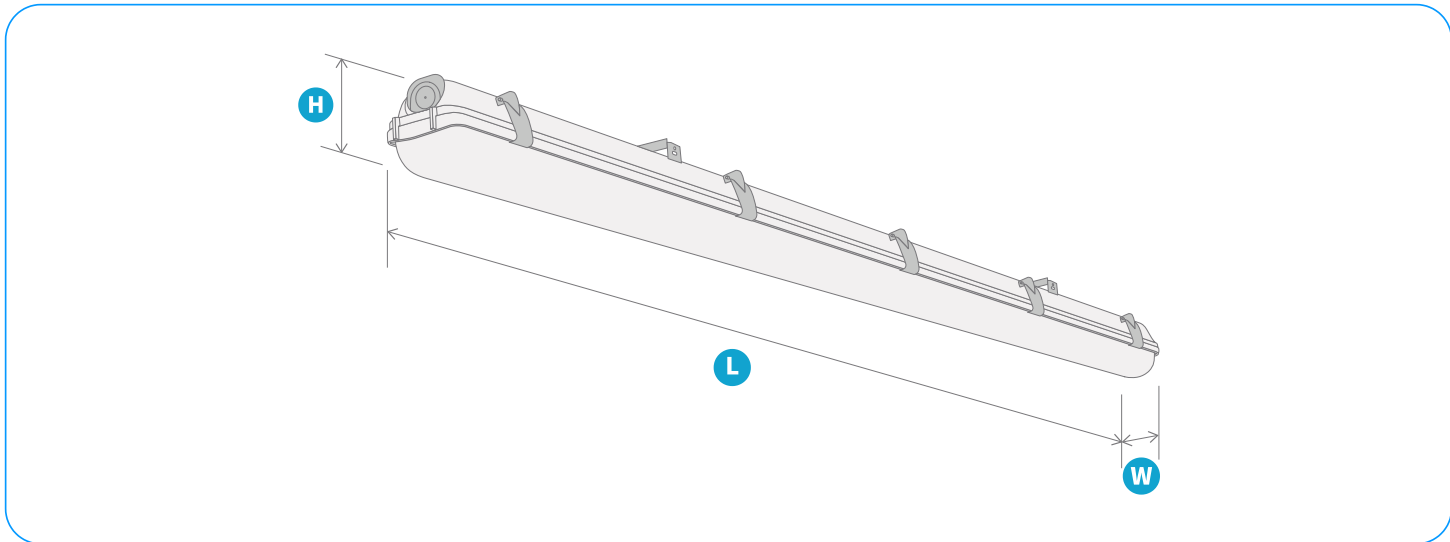


	H	W	L
IND7DC.1	84	101	703
IND7DC.2	84	101	1265

Montage

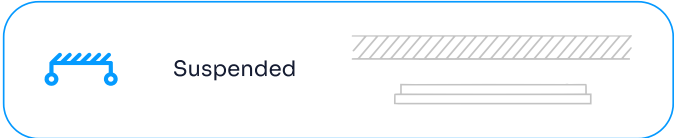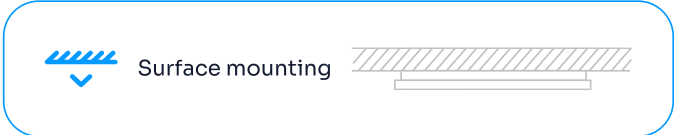

Luminous flux

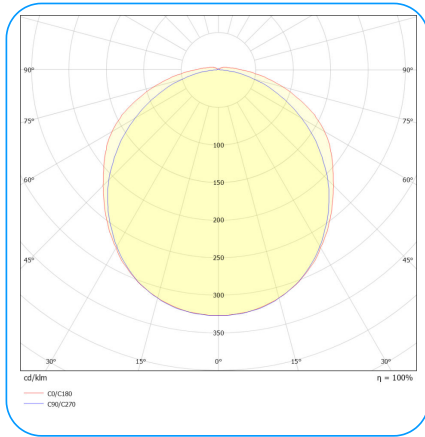

120°X105°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
IND7DC INDUSTRIAL LED 24VDC 7.0	1 1	0 Standard	020 20W	8 >80	A Mid Power	3000 3000K	0 No lens	P21 PC diffuser Transparent	120105 120°x105°	00 On/Off	0030 -0°C÷30°C	03Y 3 Years	0000 No modification
	2 2		040 40W			4000 4000K							E010 No driver
						5000 5000K							

Example product code

IND7DC.10.020.8A3000.0P21.120105.00.0030.03Y.0000

Photo Gallery

