

INDUSTRIAL GRP LED MN 6.0

Advantages

- High luminous efficiency up to 180Lm/W
- High protection class IP66
- Quick and easy installation
- Branded components
- Warranty up to 10 years
- High operating temperature range



IP66

IK08




INDUSTRIAL GRP LED MN 6.0 1

| | P | | | Ra | IP | | |
|----------------------|----|------|-------|-----|------|----------|-------|
| ING6MN.10.014.8A3000 | 14 | 2050 | 3000K | >80 | IP66 | 135°X90° | 1,2kg |
| ING6MN.10.014.8A4000 | 14 | 2150 | 4000K | >80 | IP66 | 135°X90° | 1,2kg |
| ING6MN.10.014.8A5000 | 14 | 2200 | 5000K | >80 | IP66 | 135°X90° | 1,2kg |



INDUSTRIAL GRP LED MN 6.0 2

| | P | | | Ra | IP | | |
|----------------------|----|------|-------|-----|------|----------|-------|
| ING6MN.20.024.8A3000 | 24 | 3700 | 3000K | >80 | IP66 | 135°X90° | 1,2kg |
| ING6MN.20.024.8A4000 | 24 | 3850 | 4000K | >80 | IP66 | 135°X90° | 1,2kg |
| ING6MN.20.024.8A5000 | 24 | 3900 | 5000K | >80 | IP66 | 135°X90° | 1,2kg |

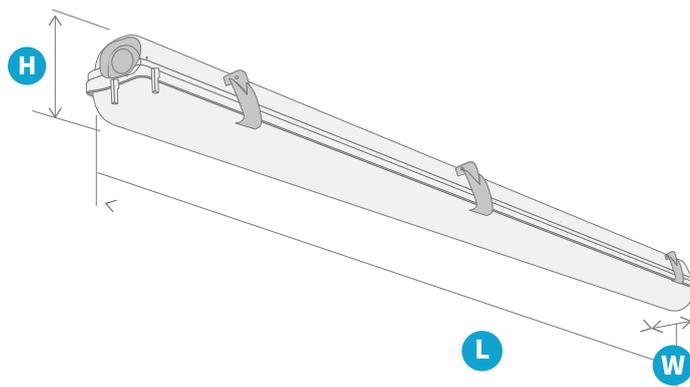


|  | H | W | L |
|---|-----|----|-----|
| ING6MN.1 | 104 | 97 | 660 |
| ING6MN.2 | 104 | 97 | 660 |

Montage

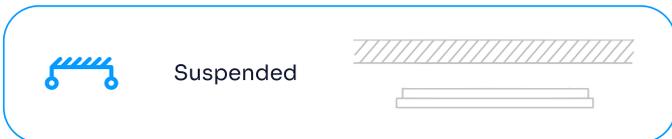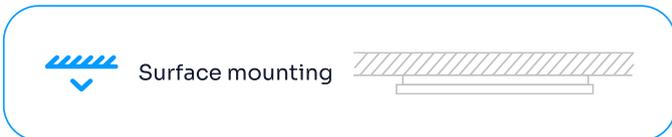

Luminous flux

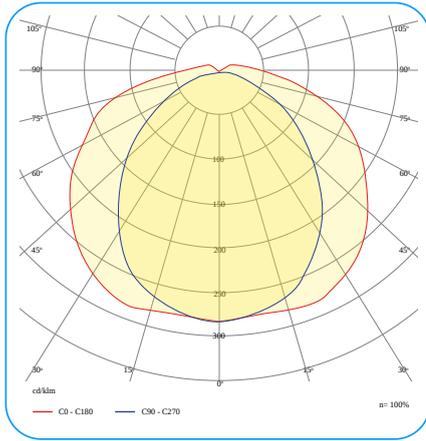

135°X90°

Available configurations

| Family | Power version | Version | Power [W] | CRI | Type of diode | CCT [K] | Lens material | Diffuser material | Beam angle | Control | Operating temperature | Warranty | Modifications |
|---|---------------|---------------|------------|----------|----------------|---------------|---------------|---------------------------------|--------------------|--------------|-----------------------|-----------------|---|
| ING6MN INDUSTRIAL GRP LED MN 6.0 | 1 1 | 0 Standard | 014 14W | 8 >80 | A Mid Power | 3000 3000K | 0 No lens | P13 PMMA diffuser Matt | 135090 135°x90° | 00 On/Off | 2545 -25°C:+45°C | 05Y 5 Years | 0000 No modification |
| | 2 2 | | 024 24W | | | 4000 4000K | | P23 PC diffuser Matt | | D0 DALI | 3555 -35°C:+55°C | 08Y 8 Years | E001 Through- wired |
| | | | | | | 5000 5000K | | | | | | 10Y 10 Years | E004 Through- wired; Quick connector |
| | | | | | | | | | | | | | E010 No driver |
| | | | | | | | | | | | | | F004 Outdoor version |

Example product code

ING6MN.10.014.8A3000.0P13.135090.00.2545.05Y.0000