

INDUSTRIAL GRP LED 6.0

Advantages

- High luminous efficiency up to 180lm/W
- High protection class IP66
- Quick and easy installation
- Branded components
- Warranty up to 10 years
- High operating temperature range



IP66

IK08



INDUSTRIAL GRP LED 6.0 1

	P			Ra	IP		
ING6ST.10.017.8A3000	17	2900 - 2950	3000K	>80	IP66	120°X110°	2kg
ING6ST.10.017.8A4000	17	3000 - 3050	4000K	>80	IP66	120°X110°	2kg
ING6ST.10.017.8A5000	17	3050 - 3100	5000K	>80	IP66	120°X110°	2kg
ING6ST.10.026.8A3000	26	4350 - 4450	3000K	>80	IP66	120°X110°	2kg
ING6ST.10.026.8A4000	26	4500 - 4600	4000K	>80	IP66	120°X110°	2kg
ING6ST.10.026.8A5000	26	4550 - 4650	5000K	>80	IP66	120°X110°	2kg
ING6ST.10.032.8A3000	32	5450 - 5550	3000K	>80	IP66	120°X110°	2kg
ING6ST.10.032.8A4000	32	5650 - 5750	4000K	>80	IP66	120°X110°	2kg

ING6ST.10.032.8A5000	32	5700 - 5800	5000K	>80	IP66	120°X110°	2kg
----------------------	----	-------------	-------	-----	------	-----------	-----

INDUSTRIAL GRP LED 6.0 2

	P			Ra	IP		
ING6ST.20.042.8A3000	42	7200 - 7350	3000K	>80	IP66	120°X110°	2kg
ING6ST.20.042.8A4000	42	7450 - 7600	4000K	>80	IP66	120°X110°	2kg
ING6ST.20.042.8A5000	42	7500 - 7650	5000K	>80	IP66	120°X110°	2kg

INDUSTRIAL GRP LED 6.0 3


	P			Ra	IP		
ING6ST.30.066.8A3000	66	11500 - 11750	3000K	>80	IP66	120°X110°	2,4kg
ING6ST.30.066.8A4000	66	11850 - 12100	4000K	>80	IP66	120°X110°	2,4kg
ING6ST.30.066.8A5000	66	11900 - 12150	5000K	>80	IP66	120°X110°	2,4kg

INDUSTRIAL GRP LED 6.0 4

	P			Ra	IP		
ING6ST.40.080.8A3000	80	12900 - 13150	3000K	>80	IP66	120°X110°	2,4kg
ING6ST.40.080.8A4000	80	13300 - 13550	4000K	>80	IP66	120°X110°	2,4kg
ING6ST.40.080.8A5000	80	13350 - 13600	5000K	>80	IP66	120°X110°	2,4kg
ING6ST.40.097.8A3000	97	15300 - 15600	3000K	>80	IP66	120°X110°	2,4kg
ING6ST.40.097.8A4000	97	15800 - 16100	4000K	>80	IP66	120°X110°	2,4kg

ING6ST.40.097.8A5000	97	15850 - 16150	5000K	>80	IP66	120°X110°	2,4kg
----------------------	----	---------------	-------	-----	------	-----------	-------

***Depending on the lens used, the luminous flux output may vary, so the table may show luminous flux ranges for a given power version for illustrative purposes.**

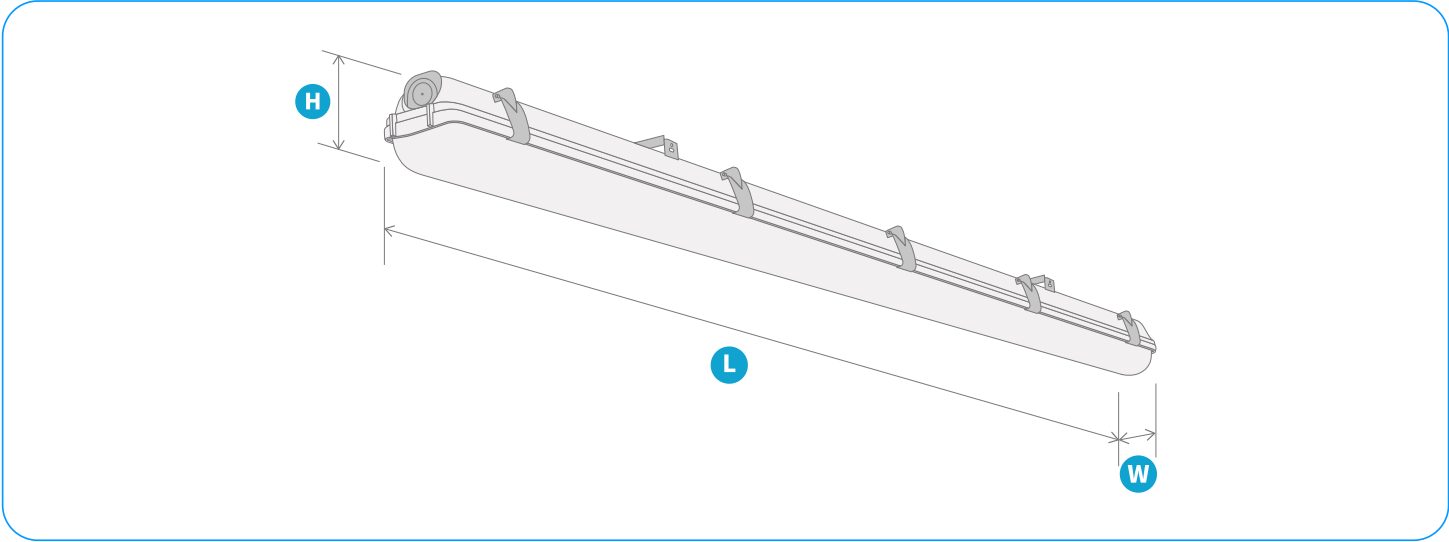

	H	W	L
ING6ST.1	84	97	1277
ING6ST.2	84	97	1277
ING6ST.3	84	97	1573
ING6ST.4	84	97	1573

Montage




Surface mounting



Suspended



Luminous flux

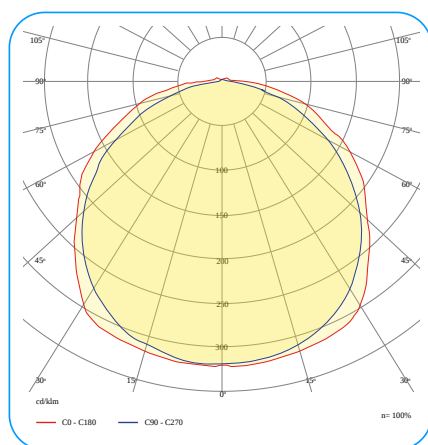

120°X110°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
ING6ST INDUSTRIAL GRP LED 6.0	1 1	0 Standard	017 17W	8 >80	A Mid Power	3000 3000K	0 No lens	P11 PMMA diffuser Transparent	120110 120°x110°	00 On/Off	0030 -0°C÷30°C	05Y 5 Years	0000 No modification
	2 2		026 26W			4000 4000K		P21 PC diffuser Transparent		D0 DALI	2040 -20°C÷40°C	08Y 8 Years	E001 Through-wired
	3 3		032 32W			5000 5000K				E3 Emergency module 3h	2540 -25°C÷40°C	10Y 10 Years	E004 Through-wired; Quick connector
	4 4		042 42W							S1 Motion sensor	3550 -35°C÷50°C		E010 No driver
			066 66W										
			080 80W										
			097 97W										

Example product code

ING6ST.10.017.8A3000.OP21.120110.00.2540.08Y.0000