INDUSTRIAL GRP LED 6.1

Advantages

- High luminous efficiency up to 187Lm/W
- High protection class IP66
- Quick and easy installation
- Branded components
- Warranty up to 10 years
- High operating temperature range



IP66 **IK**08

INDUSTRIAL GRP LED 6.1 1

	P			Ra	IP		
ING6ST.11.019.8A4000	19	3350 - 3400	4000K	>80	IP66	110°X105°	2kg
ING6ST.11.019.8A5000	19	3400 - 3450	5000K	>80	IP66	110°X105°	2kg
ING6ST.11.023.8A4000	23	4100 - 4200	4000K	>80	IP66	110°X105°	2kg
ING6ST.11.023.8A5000	23	4150 - 4250	5000K	>80	IP66	110°X105°	2kg
ING6ST.11.031.8A4000	31	5600 - 5700	4000K	>80	IP66	110°X105°	2kg
ING6ST.11.031.8A5000	31	5650 - 5750	5000K	>80	IP66	110°X105°	2kg
ING6ST.11.040.8A4000	40	7150 - 7300	4000K	>80	IP66	110°X105°	2kg
ING6ST.11.040.8A5000	40	7200 - 7350	5000K	>80	IP66	110°X105°	2kg

To determine the exact light parameters for the selected beam angle, you need to use the photometric files for the specified beam angle.
Download link: LDT-LUXON-LED.zip


ING6ST.11.057.8A4000	57	9900 - 10100	4000K	>80	IP66	110°X105°	2kg
ING6ST.11.057.8A5000	57	9950 - 10150	5000K	>80	IP66	110°X105°	2kg

INDUSTRIAL GRP LED 6.1 2

	P	1m	K	Ra	IP		KG
ING6ST.21.043.8A4000	43	7850 - 8000	4000K	>80	IP66	110°X105°	2,4kg
ING6ST.21.043.8A5000	43	7900 - 8050	5000K	>80	IP66	110°X105°	2,4kg
ING6ST.21.056.8A4000	56	10200 - 10400	4000K	>80	IP66	110°X105°	2,4kg
ING6ST.21.056.8A5000	56	10250 - 10450	5000K	>80	IP66	110°X105°	2,4kg
ING6ST.21.071.8A4000	71	12500 - 12750	4000K	>80	IP66	110°X105°	2,4kg
ING6ST.21.071.8A5000	71	12550 - 12800	5000K	>80	IP66	110°X105°	2,4kg
ING6ST.21.092.8A4000	92	15600 - 15900	4000K	>80	IP66	110°X105°	2,4kg
ING6ST.21.092.8A5000	92	15650 - 15950	5000K	>80	IP66	110°X105°	2,4kg

***Depending on the lens used, the luminous flux value may vary. Therefore, the table may include luminous flux ranges for a given power version, provided for reference purposes only.**

To determine the exact light parameters for the selected beam angle, you need to use the photometric files for the specified beam angle.
Download link: LDT-LUXON-LED.zip

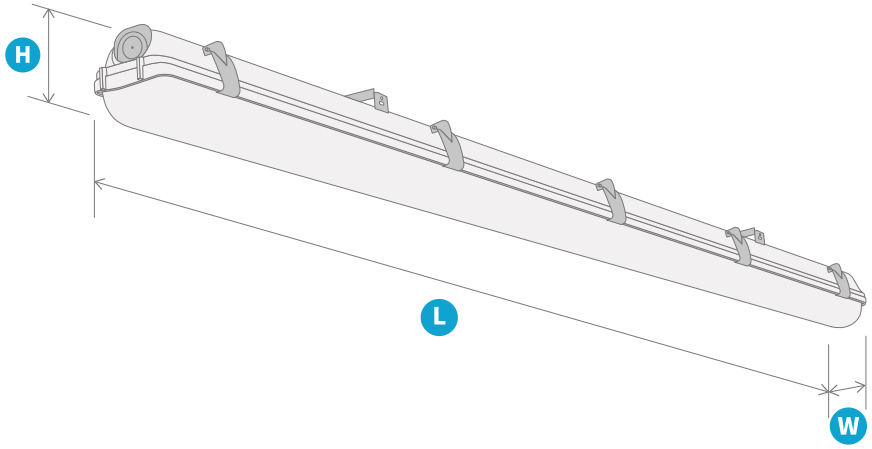


		H	W	L
STANDARD DALI	ING6ST.1	84 84	97 97	1277 1277
STANDARD DALI	ING6ST.2	84 84	97 97	1573 1573

Montage








To determine the exact light parameters for the selected beam angle, you need to use the photometric files for the specified beam angle.
Download link: LDT-LUXON-LED.zip

Luminous flux

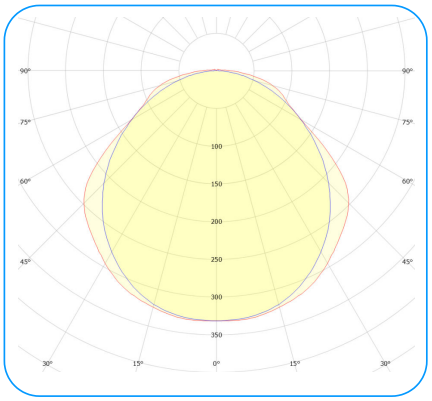

110°X105°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
ING6ST INDUSTRIAL GRP LED 6.1	1 1	1 LIft 1	019 19W	8 >80	A Mid Power	4000 4000K	0 No lens	P11 PMMA diffuser Transparent	110105 110°x105°	00 On/Off	2540 -25°C÷40°C	05Y 5 Years	0000 No modification
	2 2		023 23W			5000 5000K		P21 PC diffuser Transparent		D0 DALI	2545 -25°C÷45°C	08Y 8 Years	E001 Through-wired
			031 31W								2550 -25°C÷50°C	10Y 10 Years	E010 Quick connector
			040 40W								3545 -35°C÷45°C		
			043 43W								3550 -35°C÷50°C		
			056 56W								3555 -35°C÷55°C		
			057 57W										
			071 71W										
			092 92W										

To determine the exact light parameters for the selected beam angle, you need to use the photometric files for the specified beam angle.
Download link: LDT-LUXON-LED.zip

Example product code

ING6ST.11.019.8A4000.0P21.110105.00.2550.05Y.0000

Photo Gallery











To determine the exact light parameters for the selected beam angle, you need to use the photometric files for the specified beam angle.
Download link: LDT-LUXON-LED.zip