

InTUBON LED 2.0



Advantages

- High IK10 impact resistance
- High luminous efficiency up to 160Lm/W
- Quick and easy installation
- Branded components



IP69K

IK10



InTUBON LED 2.0 1



P



Ra

IP



ITB2ST.10.024.8A4000

24

3850

4000K

>80

IP69K

90°X90° 60°X60°

1,8kg

ITB2ST.10.024.8A5000

24

3950

5000K

>80

IP69K

90°X90° 60°X60°

1,8kg

ITB2ST.10.030.8A4000

30

4750

4000K

>80

IP69K

90°X90° 60°X60°

1,8kg

ITB2ST.10.030.8A5000

30

4850

5000K

>80

IP69K

90°X90° 60°X60°

1,8kg

InTUBON LED 2.0 2



P



Ra

IP



ITB2ST.20.036.8A4000

36

5750

4000K

>80

IP69K

90°X90° 60°X60°

2,2kg

ITB2ST.20.036.8A5000

36

5850

5000K

>80

IP69K

90°X90° 60°X60°

2,2kg

ITB2ST.20.045.8A4000

45

7150

4000K

>80

IP69K

90°X90° 60°X60°

2,2kg

ITB2ST.20.045.8A5000

45

7250

5000K

>80


IP69K

90°X90° 60°X60°

2,2kg

InTUBON LED 2.0 3

	P			Ra	IP		
ITB2ST.30.048.8A4000	48	7700	4000K	>80	IP69K	90°X90° 60°X60°	2,6kg
ITB2ST.30.048.8A5000	48	7800	5000K	>80	IP69K	90°X90° 60°X60°	2,6kg
ITB2ST.30.060.8A4000	60	9500	4000K	>80	IP69K	90°X90° 60°X60°	2,6kg
ITB2ST.30.060.8A5000	60	9600	5000K	>80	IP69K	90°X90° 60°X60°	2,6kg

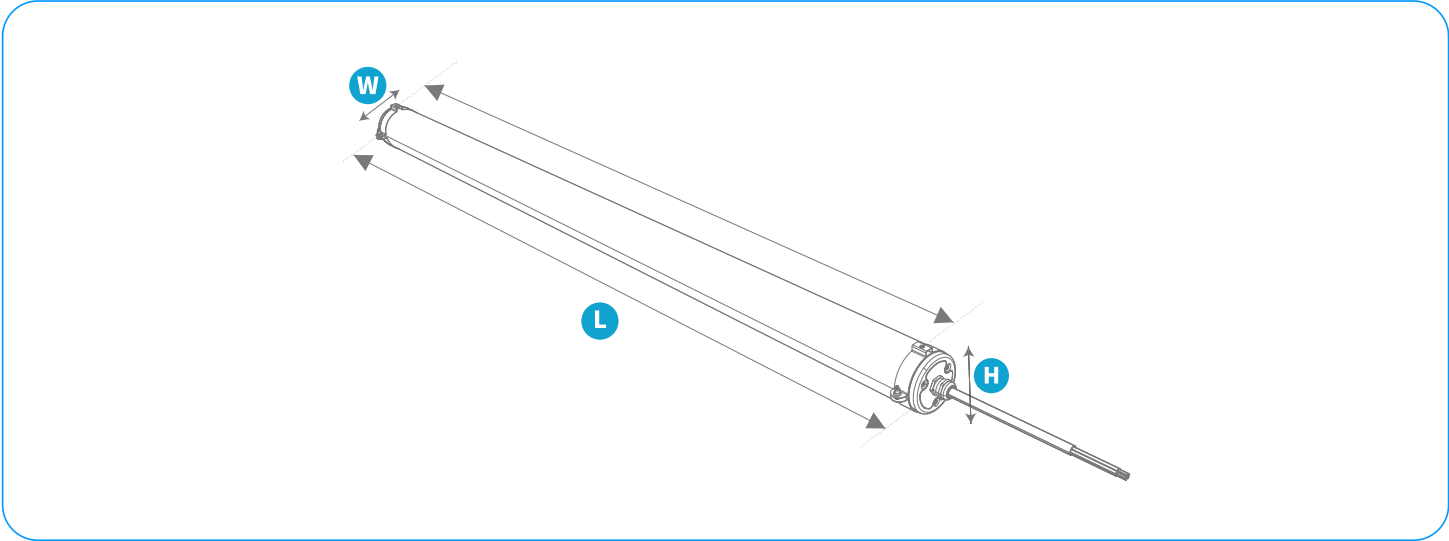

	H	W	L
ITB2ST.1	70	70	720
ITB2ST.2	70	70	1000
ITB2ST.3	70	70	1280

Montage




Surface mounting




Suspended



Luminous flux

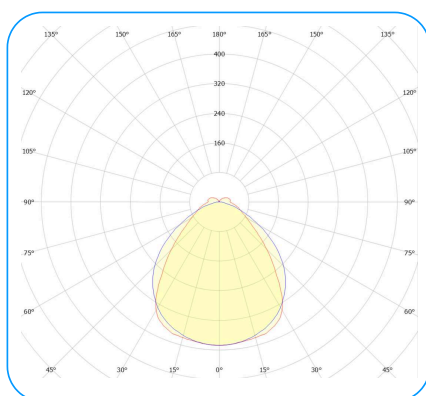

90°X90°

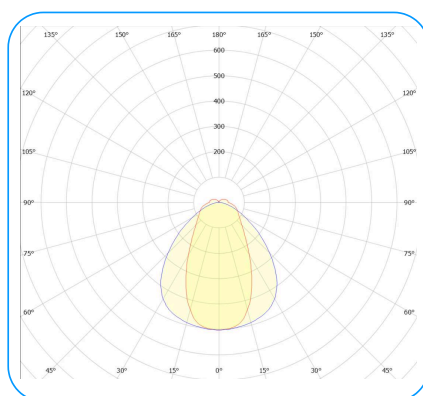

60°X60°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
ITB2ST InTUBON LED 2.0	1 1	0 Standard	024 24W	8 >80	A Mid Power	4000 4000K	2 PC lens	P21 PC diffuser Transparent	060060 60°x60°	00 On/Off	2540 -25°C÷+40°C	05Y 5 Years	0000 No modification
	2 2		030 30W			5000 5000K			090090 90°x90°	D0 DALI	3550 -35°C÷+50°C	08Y 8 Years	E001 Through-wired
	3 3		036 36W									10Y 10 Years	F004 Outdoor version
			045 45W										
			048 48W										
			060 60W										

Example product code

ITB2ST.10.024.8A4000.2P21.090090.00.2540.05Y.0000