

# Intubon LED 3.0



## Advantages

- High protection class IP69K
- High IK10 impact resistance
- High luminous efficiency up to 150Lm/W
- Quick and easy installation
- No visible light spots



IP69K

IK10




## Intubon LED 3.0 1

|                      | P  |      |       | Ra  | IP    |           |       |
|----------------------|----|------|-------|-----|-------|-----------|-------|
| ITB3ST.10.019.8A4000 | 19 | 2850 | 4000K | >80 | IP69K | 135°X105° | 1,4kg |
| ITB3ST.10.029.8A4000 | 29 | 4200 | 4000K | >80 | IP69K | 135°X105° | 1,4kg |
| ITB3ST.10.044.8A4000 | 44 | 6200 | 4000K | >80 | IP69K | 135°X105° | 1,4kg |
| ITB3ST.10.058.8A4000 | 58 | 8650 | 4000K | >80 | IP69K | 135°X105° | 1,4kg |

## Intubon LED 3.0 2

|                      | P  |       |       | Ra  | IP    |           |       |
|----------------------|----|-------|-------|-----|-------|-----------|-------|
| ITB3ST.20.035.8A4000 | 35 | 5250  | 4000K | >80 | IP69K | 135°X105° | 1,8kg |
| ITB3ST.20.060.8A4000 | 60 | 8550  | 4000K | >80 | IP69K | 135°X105° | 1,8kg |
| ITB3ST.20.073.8A4000 | 73 | 10850 | 4000K | >80 | IP69K | 135°X105° | 1,8kg |

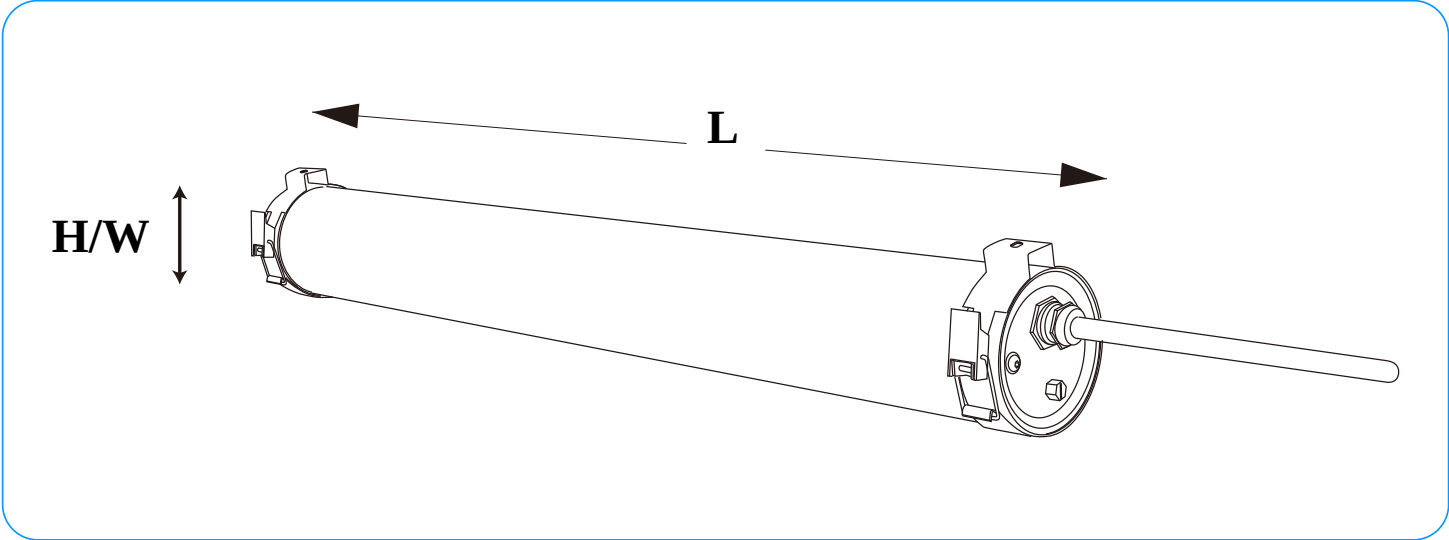

|               |  | H        | W        | L            |
|---------------|-----------------------------------------------------------------------------------|----------|----------|--------------|
| STANDARD DALI | ITB3ST.1                                                                          | 73<br>73 | 73<br>73 | 1170<br>1170 |
| STANDARD DALI | ITB3ST.2                                                                          | 73<br>73 | 73<br>73 | 1495<br>1495 |


Montage



 Surface mounting 

 Suspended 

Luminous flux

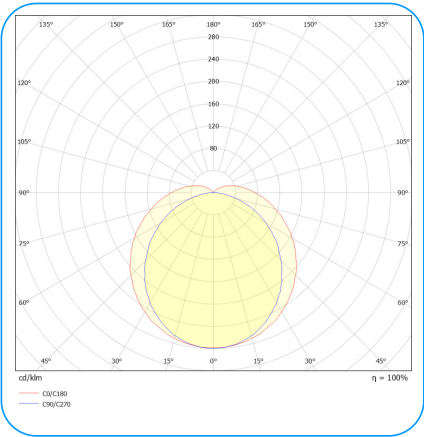

135°X105°

Available configurations

| Family                    | Power version | Version       | Power [W]  | CRI      | Type of diode  | CCT [K]       | Lens material | Diffuser material       | Beam angle          | Control      | Operating temperature | Warranty        | Modifications           |
|---------------------------|---------------|---------------|------------|----------|----------------|---------------|---------------|-------------------------|---------------------|--------------|-----------------------|-----------------|-------------------------|
| ITB3ST<br>Intubon LED 3.0 | 1<br>1        | 0<br>Standard | 019<br>19W | 8<br>>80 | A<br>Mid Power | 4000<br>4000K | 0<br>No lens  | P23<br>PC diffuser Matt | 135105<br>135°x105° | 00<br>On/Off | 2540<br>-25°C÷+40°C   | 05Y<br>5 Years  | 0000<br>No modification |
|                           | 2<br>2        |               | 029<br>29W |          |                |               |               |                         |                     | D0<br>DALI   | 3545<br>-35°C÷+45°C   | 08Y<br>8 Years  |                         |
|                           |               |               | 035<br>35W |          |                |               |               |                         |                     |              | 3550<br>-35°C÷+50°C   | 10Y<br>10 Years |                         |
|                           |               |               | 044<br>44W |          |                |               |               |                         |                     |              |                       |                 |                         |
|                           |               |               | 058<br>58W |          |                |               |               |                         |                     |              |                       |                 |                         |
|                           |               |               | 060<br>60W |          |                |               |               |                         |                     |              |                       |                 |                         |
|                           |               |               | 073<br>73W |          |                |               |               |                         |                     |              |                       |                 |                         |

Example product code

ITB3ST.10.019.8A4000.OP23.135105.00.2540.05Y.0000

## Photo Gallery

