

LUMILINE LED 3.0

Advantages

- Solid aluminum housing
- Several variants of available types of diffusers
- Branded components
- Quick and easy installation



IP20



LUMILINE LED 3.0 1



P



Ra

IP



LML3ST.10.011.8A3000

11

1300 - 1400

3000K

>80

IP20

100°X105° 85°X90°

1kg

LML3ST.10.011.8A4000

11

1350 - 1450

4000K

>80

IP20

100°X105° 85°X90°

1kg

LML3ST.10.017.8A3000

17

1950 - 2150

3000K

>80

IP20

100°X105° 85°X90°

1kg

LML3ST.10.017.8A4000

17

2050 - 2250

4000K

>80

IP20

100°X105° 85°X90°

1kg

LUMILINE LED 3.0 2



P



Ra

IP



LML3ST.20.032.8A3000

32

3850 - 4350

3000K

>80

IP20

100°X105° 85°X90°

2kg

LML3ST.20.032.8A4000

32

4100 - 4600

4000K

>80

IP20

100°X105° 85°X90°

2kg


LUMILINE LED 3.0 3

	P			Ra	IP		
LML3ST.30.046.8A3000	46	5850 - 6450	3000K	>80	IP20	100°X105° 85°X90°	2,7kg
LML3ST.30.046.8A4000	46	6150 - 6750	4000K	>80	IP20	100°X105° 85°X90°	2,7kg

LUMILINE LED 3.0 4

	P			Ra	IP		
LML3ST.40.076.8A3000	76	9750 - 10750	3000K	>80	IP20	100°X105° 85°X90°	4,1kg
LML3ST.40.076.8A4000	76	10250 - 11200	4000K	>80	IP20	100°X105° 85°X90°	4,1kg

***Depending on the lens used, the luminous flux output may vary, so the table may show luminous flux ranges for a given power version for illustrative purposes.**

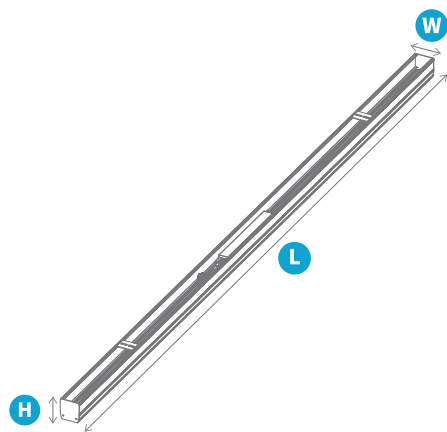

	H	W	L
LML3ST.1	52	50	585
LML3ST.2	52	50	1225
LML3ST.3	52	50	1799
LML3ST.4	52	50	2945

Montage




Surface mounting




Suspended



Luminous flux

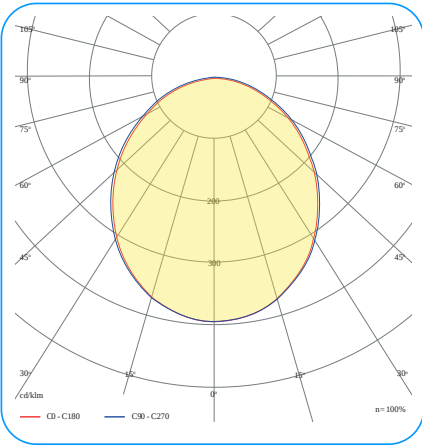

100°X105°

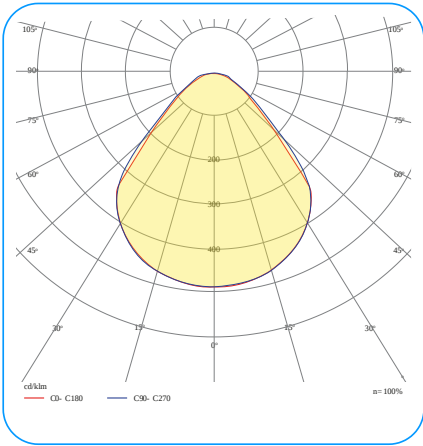

85°X90°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
LML3ST LUMILINE LED 3.0	1 1	0 Standard	011 11W	8 >80	A Mid Power	3000 3000K	0 No lens	P12 PMMA diffuser Frosted	085090 85°x90°	00 On/Off	2040 -20°C÷+40°C	05Y 5 Years	BLOO Black, RAL9005; Left
	2 2		017 17W			4000 4000K		P14 PMMA diffuser Microprismatic	100105 100°x105°	D0 DALI			BM00 Black, RAL9005; Middle
	3 3		032 32W										BR00 Black, RAL9005; Right
	4 4		046 46W										GO01 Gray, RAL7038
			076 76W										GL00 Gray, RAL7038; Surface mounted
													GM00 Gray, RAL7038; Left
													GR00 Gray, RAL7038; Middle

Example product code

LML3ST.10.011.8A3000.OP12.100105.D0.2040.05Y.G001

