


LINVERA LED SF 1.0

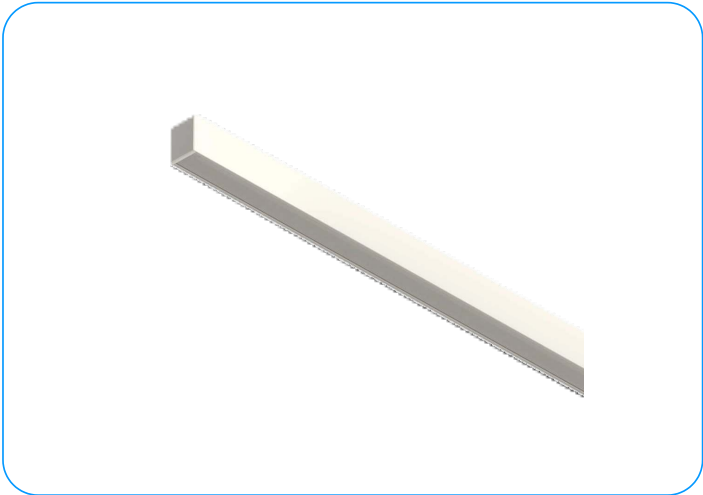

Advantages

- No visible light spots
- Branded components
- Elegant design, powder-coated aluminum housing
- Various color variants of the housing
- Several variants of available types of diffusers

IP40

IK04

CE

LINVERA LED SF 1.0 1

	P			Ra	IP		
LNV1SF.10.010.8A3000	10	1150 - 1300	3000K	>80	IP40	115°X115° 90°X100°	1kg
LNV1SF.10.010.8A4000	10	1300 - 1450	4000K	>80	IP40	115°X115° 90°X100°	1kg
LNV1SF.10.015.8A3000	15	1700 - 1900	3000K	>80	IP40	115°X115° 90°X100°	1kg
LNV1SF.10.015.8A4000	15	1900 - 2100	4000K	>80	IP40	115°X115° 90°X100°	1kg

LINVERA LED SF 1.0 2

	P			Ra	IP		
LNV1SF.20.019.8A3000	19	2350 - 2600	3000K	>80	IP40	115°X115° 90°X100°	1,8kg
LNV1SF.20.019.8A4000	19	2600 - 2850	4000K	>80	IP40	115°X115° 90°X100°	1,8kg
LNV1SF.20.029.8A3000	29	3450 - 3800	3000K	>80	IP40	115°X115° 90°X100°	1,8kg

LNV1SF.20.029.8A4000	29	3850 - 4200	4000K	>80	IP40	115°X115° 90°X100°	1,8kg
LNV1SF.20.030.8A3000	30	4250	3000K	>80	IP40	75°X75°	1,8kg
LNV1SF.20.030.8A4000	30	4650	4000K	>80	IP40	75°X75°	1,8kg


LINVERA LED SF 1.0 3

	P			Ra	IP		
LNV1SF.30.029.8A3000	29	3500 - 3850	3000K	>80	IP40	115°X115° 90°X100°	2,6kg
LNV1SF.30.029.8A4000	29	3900 - 4300	4000K	>80	IP40	115°X115° 90°X100°	2,6kg
LNV1SF.30.044.8A3000	44	5150 - 6350	3000K	>80	IP40	115°X115° 90°X100° 75°X75°	2,6kg
LNV1SF.30.044.8A4000	44	5750 - 6850	4000K	>80	IP40	115°X115° 90°X100° 75°X75°	2,6kg

LINVERA LED SF 1.0 4



	P			Ra	IP		
LNV1SF.40.038.8A3000	38	4650 - 5150	3000K	>80	IP40	115°X115° 90°X100°	3,4kg
LNV1SF.40.038.8A4000	38	5200 - 5700	4000K	>80	IP40	115°X115° 90°X100°	3,4kg
LNV1SF.40.058.8A3000	58	6900 - 7600	3000K	>80	IP40	115°X115° 90°X100°	3,4kg
LNV1SF.40.058.8A4000	58	7650 - 8450	4000K	>80	IP40	115°X115° 90°X100°	3,4kg

***Depending on the lens used, the luminous flux output may vary, so the table may show luminous flux ranges for a given power version for illustrative purposes.**

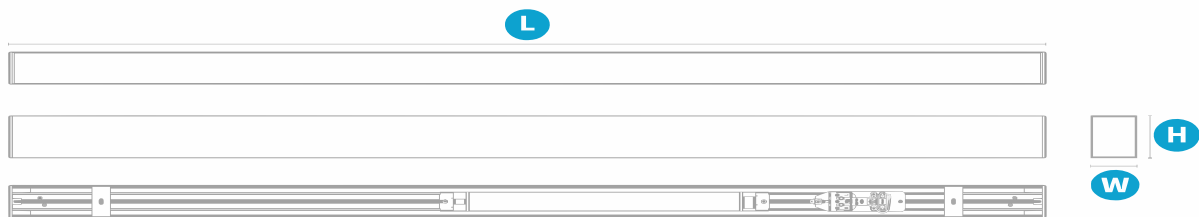


	H	W	L
LNV1SF.1	65	50	572
LNV1SF.2	65	50	1132
LNV1SF.3	65	50	1692
LNV1SF.4	65	50	2252


Montage

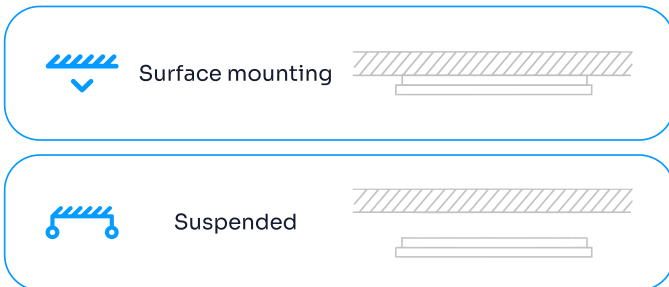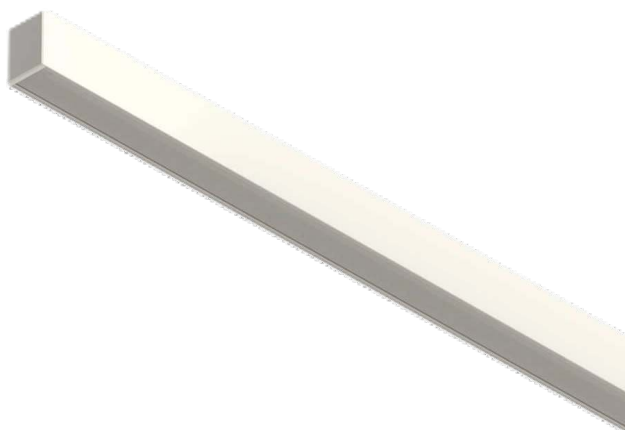


Luminous flux

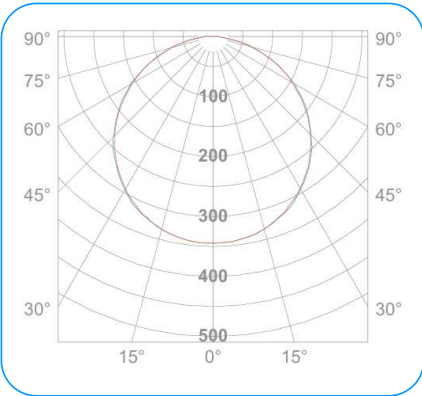

115°X115°

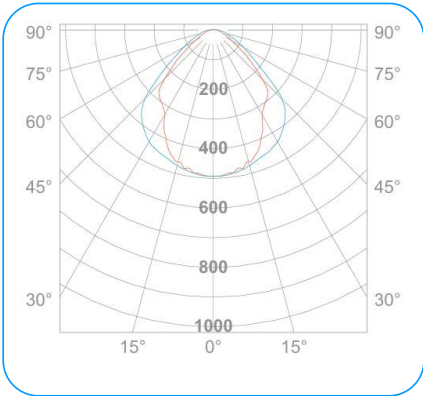

90°X100°

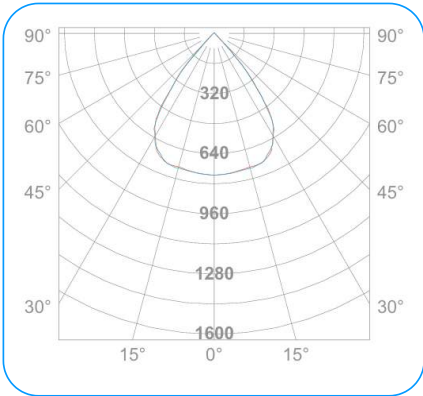

75°X75°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
LNVI5F LINVERA LED SF1.0	1 1	0 Standard	010 10W	8 >80	A Mid Power	3000 3000K	0 No lens	P13 PMMA diffuser Matt	075075 75°x75°	00 On/Off	0035 -0°C÷35°C	05Y 5 Years	B001 Black, RAL9005
	2 2		015 15W			4000 4000K	1 PMMA lens	P14 PMMA diffuser Microprismatic	090100 90°x100°	D0 DALI			G001 Gray, RAL7038
	3 3		019 19W					R33 Aluminium louvre Matt	115115 115°x115°				W001 White, RAL9016
	4 4		029 29W										
			030 30W										
			038 38W										
			044 44W										
			058 58W										

Example product code

LVN1SF.10.010.8A3000.OP13.115115.00.0035.05Y.W001