

LUMITRACK SPOT LED 1.0



Advantages

- High luminous efficiency up to 180lm/W
- Solid aluminum housing
- Quick and easy installation
- Several variants of available types of diffusers
- Various color variants of the housing
- Elegant design, powder-coated aluminum housing



IP20

IK03



LUMITRACK SPOT LED 1.0 1



P



Ra

IP



LTS1ST.10.017.8A3000

17

1950 -
2450

3000K

>80

IP20

35°X35° 55°X55° 90°X90° 105°X95°
90°X75° 45°X90° 35°X80° 35°X85°
65°X100° 90°X105° 100°X125° 55°X90°

0,6kg

LTS1ST.10.017.8A4000

17

2050 -
2600

4000K

>80

IP20

35°X35° 55°X55° 90°X90° 105°X95°
90°X75° 45°X90° 35°X80° 35°X85°
65°X100° 90°X105° 100°X125° 55°X90°

0,6kg

LTS1ST.10.017.8A5000

17

2100 -
2650

5000K

>80

IP20

35°X35° 55°X55° 90°X90° 105°X95°
90°X75° 45°X90° 35°X80° 35°X85°
65°X100° 90°X105° 100°X125° 55°X90°

0,6kg

LTS1ST.10.018.8A3000

18

2350 -
2650

3000K

>80

IP20

55°X55° 90°X95° 40°X90° 80°X85°

0,6kg

LTS1ST.10.018.8A4000

18

2500 -
2800

4000K

>80

IP20

55°X55° 90°X95° 40°X90° 80°X85°

0,6kg

LTS1ST.10.018.8A5000

18

2550 -
2850

5000K

>80

IP20


55°X55° 90°X95° 40°X90° 80°X85°

0,6kg

LTS1ST.10.020.8A3000	20	2200 - 2700	3000K	>80	IP20	95°X115° 65°X115° 40°X90° 45°X105° 80°X130° 90°X90° 105°X105°	0,6kg
LTS1ST.10.020.8A4000	20	2350 - 2850	4000K	>80	IP20	95°X115° 65°X115° 40°X90° 45°X105° 80°X130° 90°X90° 105°X105°	0,6kg

LTS1ST.10.020.8A5000	20	2400 - 2900	5000K	>80	IP20	95°X115° 65°X115° 40°X90° 45°X105° 80°X130° 90°X90° 105°X105°	0,6kg
----------------------	----	-------------	-------	-----	------	--	-------

***Depending on the lens used, the luminous flux output may vary, so the table may show luminous flux ranges for a given power version for illustrative purposes.**

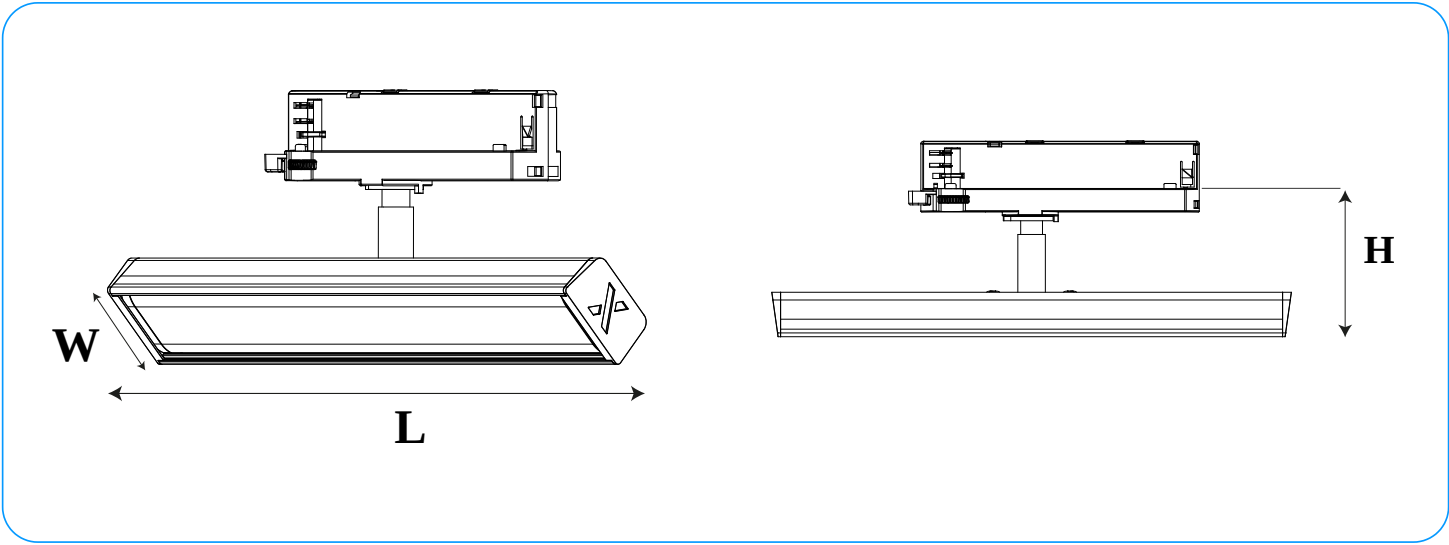

		H	W	L
--	--	---	---	---

STANDARD	LTS1ST.1	88	49	302
DALI		88	49	302


Montage




3-phase rail




Luminous flux

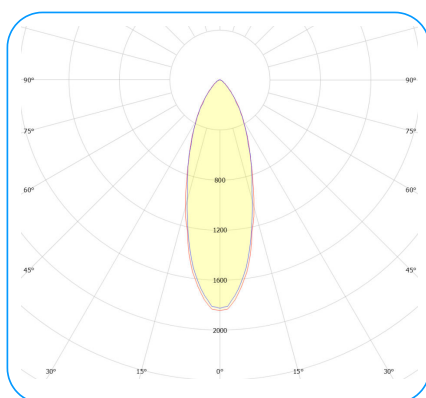


35°X35°

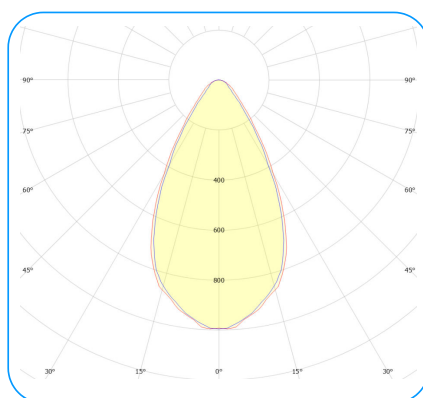


55°X55°

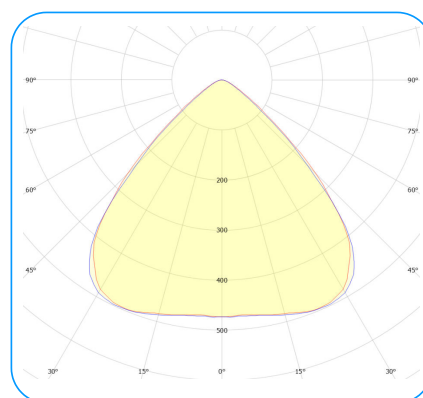


90°X90°

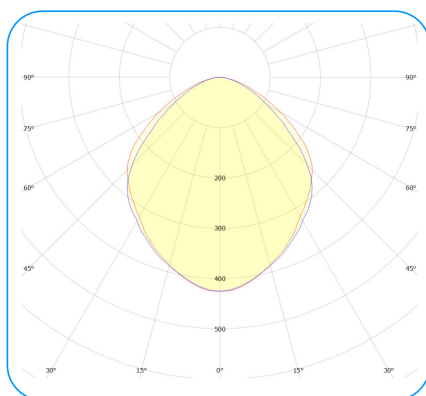


105°X95°

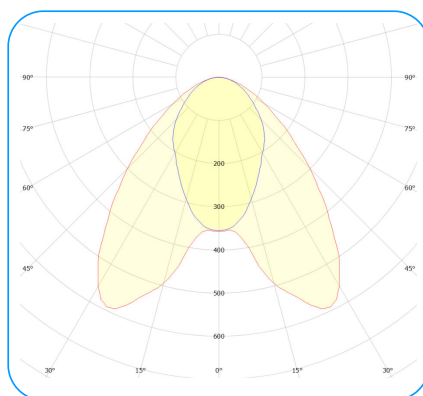


90°X75°

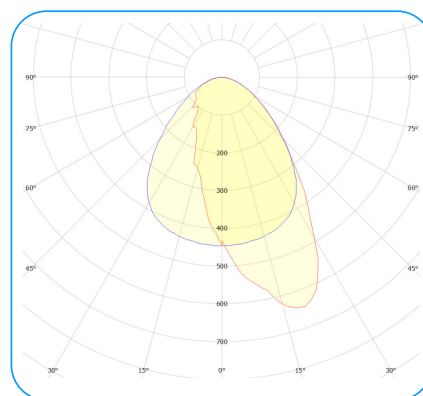


45°X90°

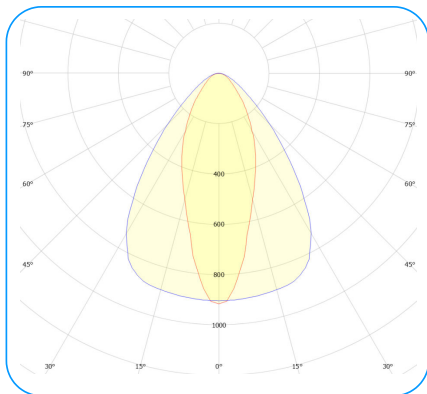


35°X80°

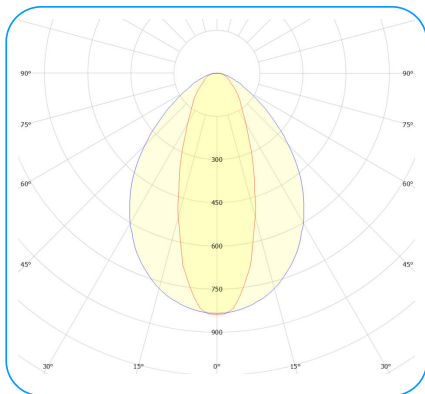


35°X85°

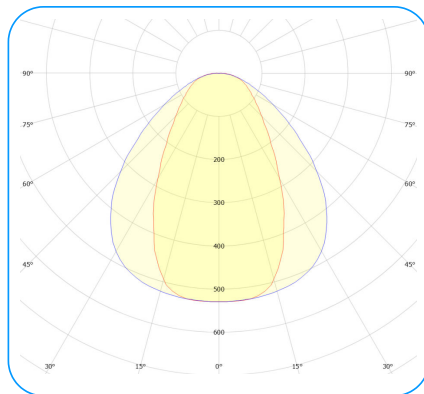


65°X100°

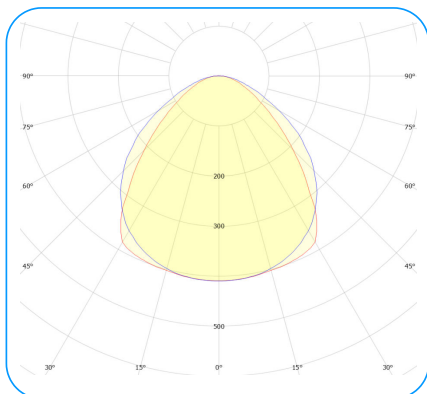


90°X105°

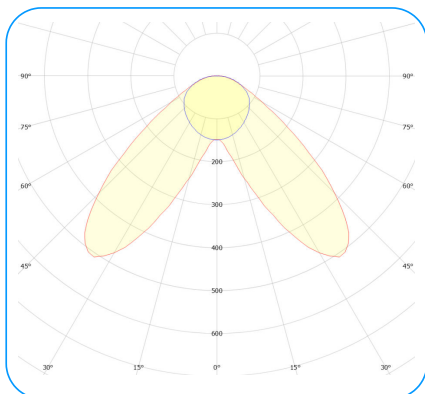


100°X125°

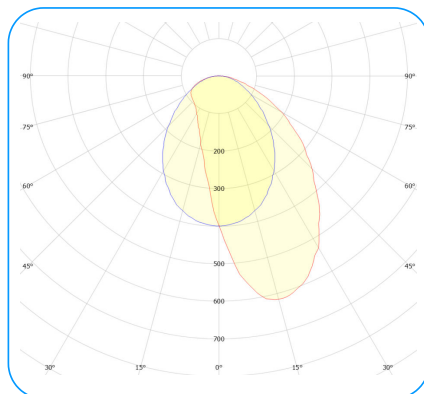


55°X90°

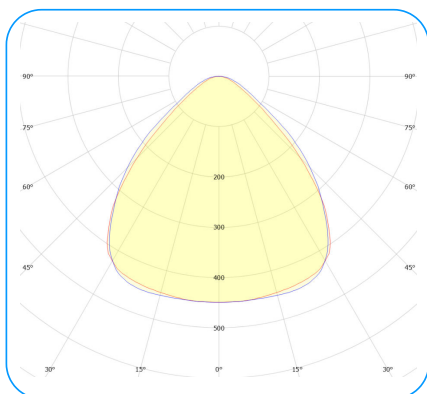


90°X95°

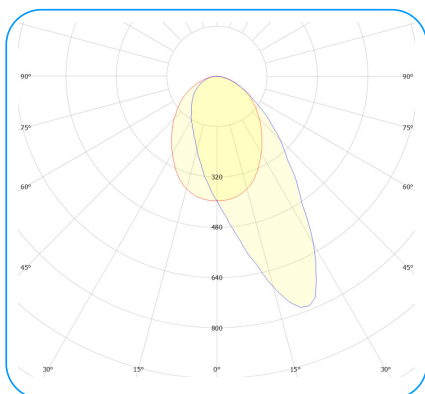


40°X90°

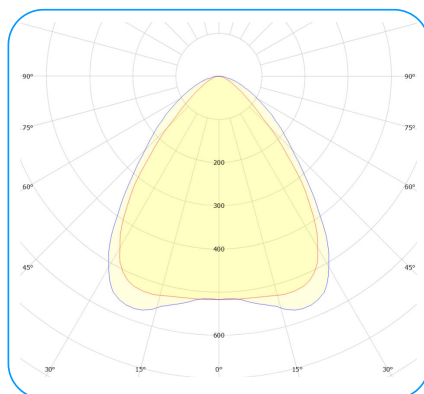


80°X85°

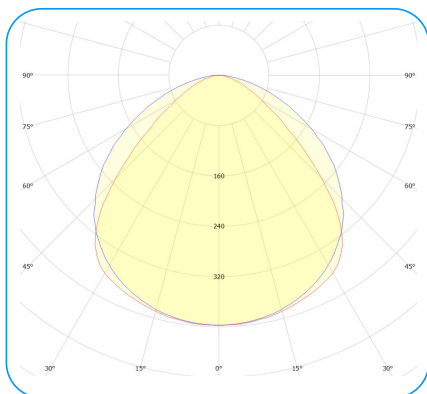


95°X115°

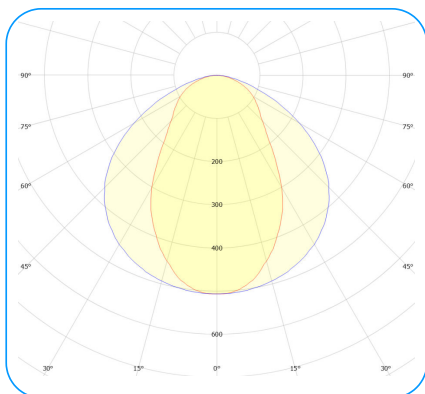


65°X115°

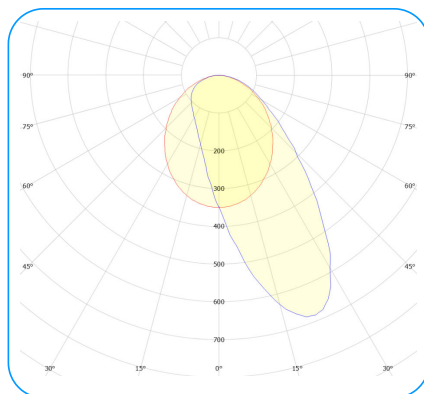

45°X105°

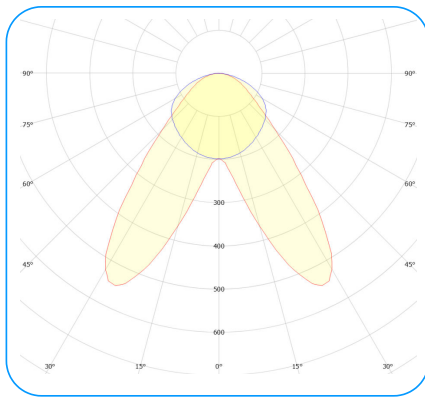

80°X130°

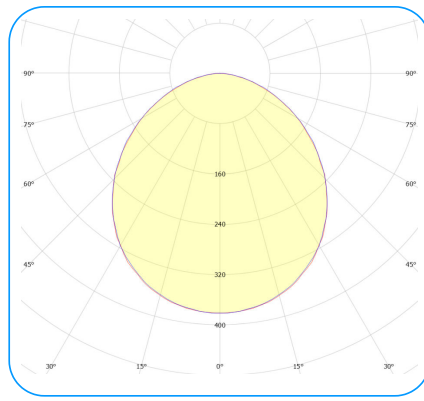

105°X105°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
LTS1ST LUMITRACK SPOT LED 1.0	1 1	0 Standard	017 17W	8 >80	A Mid Power	3000 3000K	0 No lens	000	035035 35°x35°	00 On/Off	2035 -20°C÷35°C	05Y 5 Years	B001 Black, RAL9005
			018 18W			4000 4000K	1 PMMA lens	P12 PMMA diffuser Frosted	035080 35°x80°	D0 DALI			W001 White, RAL9016
			020 20W			5000 5000K	F Lens PC FX	P14 PMMA diffuser Microprismatic	035085 35°x85°				
							H Lens PC HE		040090 40°x90°				
							P Lens PC PF		045090 45°x90°				
									045105 45°x105°				
									055055 55°x55°				
									055090 55°x90°				
									065100 65°x100°				
									065115 65°x115°				
									080085 80°x85°				
									080130 80°x130°				
									090075 90°x75°				
									090090 90°x90°				

									090095 90°x95°				
									090105 90°x105°				
									095115 95°x115°				
									100125 100°x125°				
									105095 105°x95°				
									105105 105°x105°				

Example product code

LTS1ST.10.017.8A3000.P000.035035.00.2035.05Y.B001

Photo Gallery

