

MADRID LED A 1.0



Advantages

- High protection class IP66
- Branded components
- High impact resistance IK09
- Solid aluminum housing

IP66

IK09



MADRID LED A 1.0 1



P



Ra

IP



MAD1WA.10.025.8A3000

25

2750

3000K

>80

IP66

135°X135°

7,1kg

MADRID LED A 1.0 2



P



Ra

IP



MAD1WA.20.050.8A3000

50

5700


3000K

>80

IP66

135°X135°

7,1kg

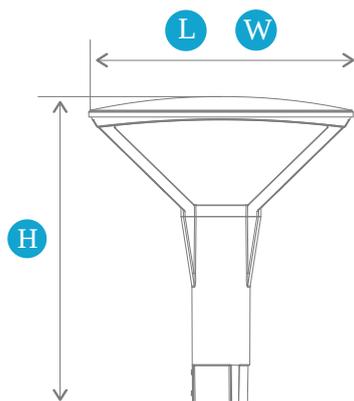


	H	W	L
---	---	---	---


MAD1WA.2	526	0	450
----------	-----	---	-----

MAD1WA.1	526	0	450
----------	-----	---	-----

Montage

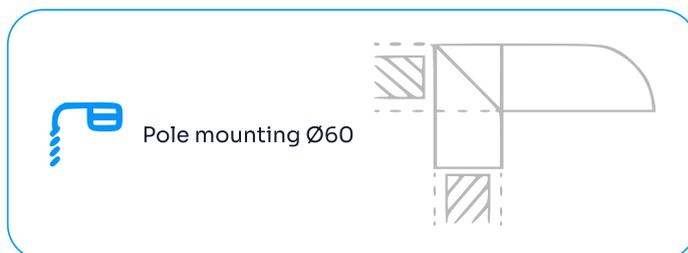

Luminous flux

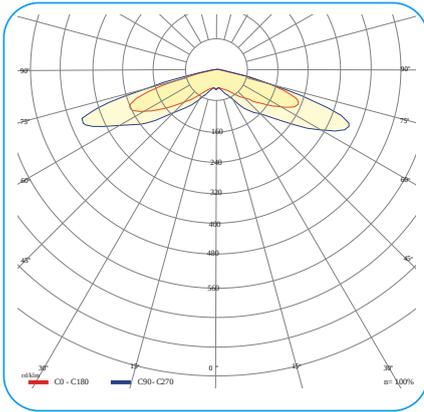

135°X135°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
MAD1WA MADRID LED A 1.0	1 1	0 Standard	025 25W	8 >80	A Mid Power	3000 3000K	1 PMMA lens	G11 Tempered glass Transparent	135135 135°x135°	B0 Other wired controls	3045 -30°C+45°C	05Y 5 Years	0000 No modification
	2 2		050 50W										

Example product code

MAD1WA.20.050.8A3000.1G11.135135.B0.3045.05Y.0000