

# SMART CLEAN LED 3.0



## Advantages

- Protection class at the level of IP65
- Several mounting options
- Several variants of available types of diffusers
- Branded components

IP65

IK06



## SMART CLEAN LED 3.0 1



P



Ra

IP



SMR3ST.10.037.8A3000

37

5000 - 5450

3000K

>80

IP65

110°X110° 90°X90° 100°X100°

9,5kg

SMR3ST.10.037.8A4000

37

5200 - 5700

4000K

>80

IP65

110°X110° 90°X90° 100°X100°

9,5kg

SMR3ST.10.037.8A5000

37

5250 - 5750

5000K


>80

IP65

110°X110° 90°X90° 100°X100°

9,5kg

**\*Depending on the lens used, the luminous flux output may vary, so the table may show luminous flux ranges for a given power version for illustrative purposes.**

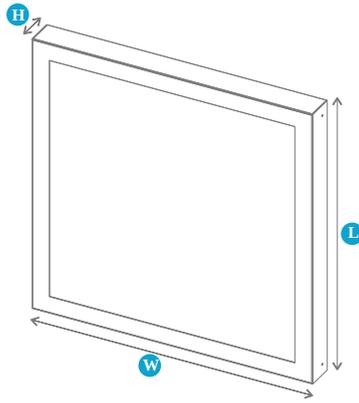

H

W

L

SMR3ST.1

60

595

595


## Montage



Surface mounting




Recessed-mounted




Plaster board




## Luminous flux

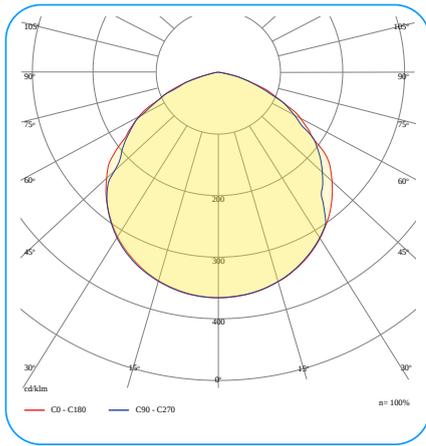

110°X110°

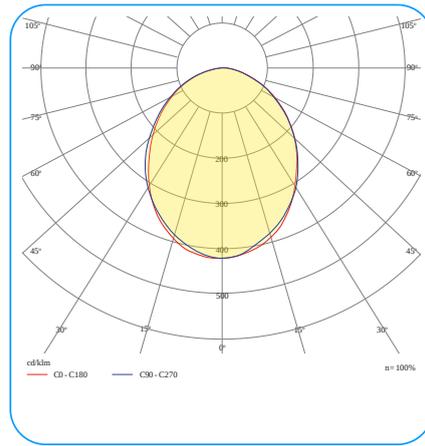

90°X90°

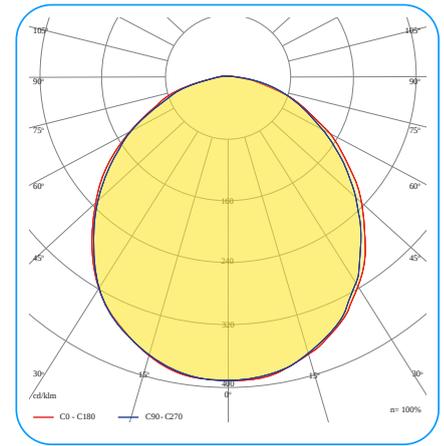

100°X100°

## Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
SMR3ST SMART CLEAN LED 3.0	1 1	0 Standard	037 37W	8 >80	A Mid Power	3000 3000K	0 No lens	G11 Tempered glass Transparent	090090 90°x90°	00 On/Off	2040 -20°C+40°C	05Y 5 Years	0000 No modification
						4000 4000K		G12 Tempered glass Frosted	100100 100°x100°	D0 DALI			
						5000 5000K		G14 Tempered glass Microprism atic	110110 110°x110°				

## Example product code

SMR3ST.10.037.8A3000.0G11.110110.DO.2040.05Y.0000