SQLIGHT LED MP 1.2

Advantages

- Luminaire with Multipower function
- Quick and easy installation
- Branded components
- Solid aluminum housing




HACCP **IP44** **IK04** **MULTIPOWER** CE

SQlight 1.2 Multipower - Optics 115°x115°

Name	Dimensions [mm]	Output current [mA]	Power [W]	Luminous flux [lm]	Luminous efficacy [lm/W]	Colour temperature [K]	Beam angle
SQlight 1.2	596 x 596	300	11	1720	156	4000K	115°x115°
		350	13	2000	154		
		400	14,5	2270	157		
		450	16	2550	159		
		500	18	2870	159		
		550	19,5	3150	162		
		600	21	3400	162		
		650	23	3670	160		
		700	25,5	4040	158		
		750	27	4300	159		
		800	29	4600	159		
		850	31	4870	157		
		900	33,5	5150	154		
		950	35	5430	155		
		1000	37	5700	154		
		1050	39	5970	153		

To determine the exact light parameters for the selected beam angle, you need to use the photometric files for the specified beam angle.
Download link: LDT-LUXON-LED.zip

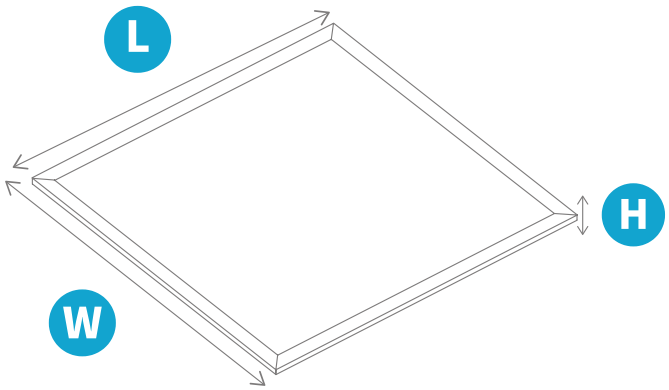

	H	W	L
SQL1MP.1	35	596	596


Montage



Surface mounting



Recessed-mounted




Modular ceiling

Suspended



To determine the exact light parameters for the selected beam angle, you need to use the photometric files for the specified beam angle.
Download link: LDT-LUXON-LED.zip

Luminous flux

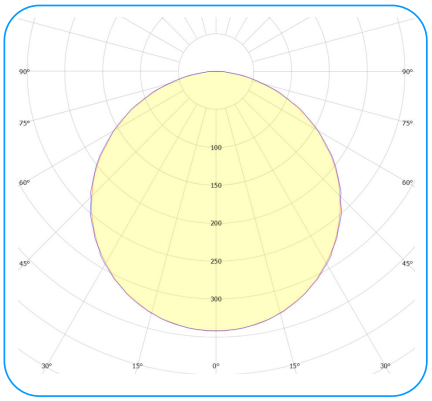

115°X115°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
SQL1MP SQLIGHT LED MP 1.2	1 1	2 LIft 2	040 **11W-39W**	8 >80	A Mid Power	4000 4000K	1 PMMA lens	P33 PS diffuser Matt	115115 115°x115°	00 On/Off	0535 -5°C÷35°C	05Y 5 Years	0000 No modification

Example product code


SQL1MP.12.040.8A4000.1P33.115115.00.0535.05Y.0000

To determine the exact light parameters for the selected beam angle, you need to use the photometric files for the specified beam angle.
Download link: LDT-LUXON-LED.zip

Photo Gallery







To determine the exact light parameters for the selected beam angle, you need to use the photometric files for the specified beam angle.
Download link: LDT-LUXON-LED.zip