


SQLIGHT LED 1.1

Advantages

- Ability to direct the light beam as desired
- Quick and easy installation
- Branded components
- Solid aluminum housing

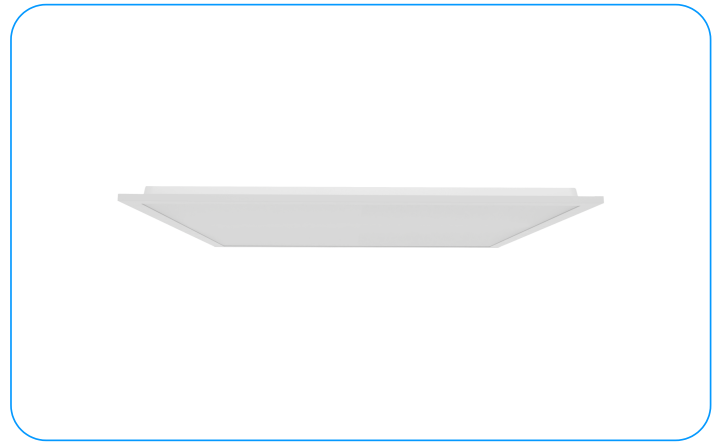

IP40



SQLIGHT LED 1.1 1



P



Ra

IP



SQL1ST.11.019.8A4000

19

2700

4000K

>80

IP40

90°X90°

1,5kg

SQLIGHT LED 1.1 2



P



Ra

IP



SQL1ST.21.023.8A4000

23

3250

4000K

>80

IP40

90°X90°

1,5kg

SQLIGHT LED 1.1 3

	P			Ra	IP		
SQL1ST.31.027.8A4000	27	3800	4000K	>80	IP40	90°X90°	1,5kg

SQLIGHT LED 1.1 4

	P			Ra	IP		
SQL1ST.41.030.8A4000	30	4150	4000K	>80	IP40	90°X90°	1,5kg


SQLIGHT LED 1.1 5

	P			Ra	IP		
SQL1ST.51.034.8A4000	34	4650	4000K	>80	IP40	90°X90°	1,5kg

SQLIGHT LED 1.1 6

	P			Ra	IP		
--	----------	--	--	-----------	-----------	--	--

SQL1ST.61.040.8A4000 40 5400 4000K >80 IP40 90°X90° 1,5kg

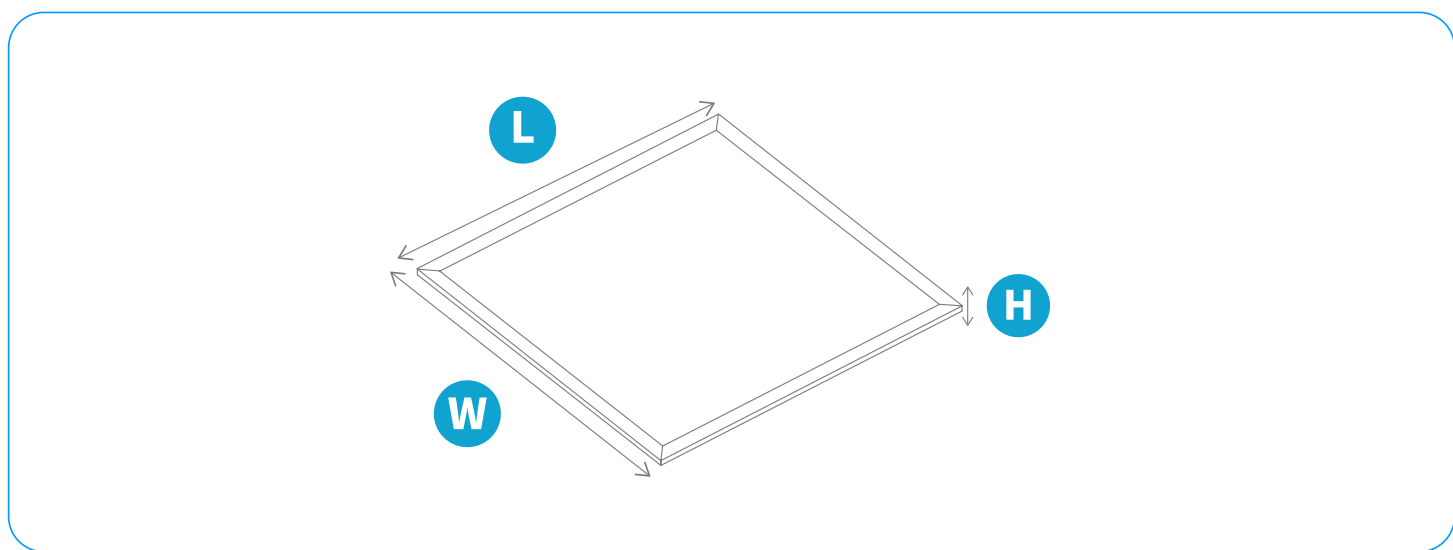

	H	W	L
--	----------	----------	----------

STANDARD DALI	SQL1ST.2	25 25	595 595	595 595
STANDARD DALI	SQL1ST.3	25 25	595 595	595 595
STANDARD DALI	SQL1ST.4	25 25	595 595	595 595
STANDARD DALI	SQL1ST.5	25 25	595 595	595 595
STANDARD DALI	SQL1ST.6	25 25	595 595	595 595
STANDARD DALI	SQL1ST.1	25 25	595 595	595 595


Montage



Surface mounting



Recessed-mounted




Modular ceiling



Suspended



Luminous flux

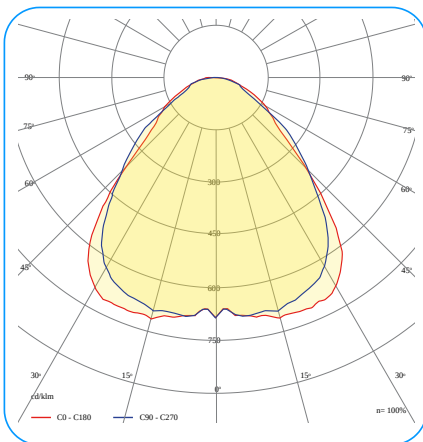

90°X90°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
SQLIST SQLIGHT LED1.1	1 1	1 Lift 1	019 19W	8 >80	A Mid Power	4000 4000K	1 PMMA lens	P34 PS diffuser Microprismatic	090090 90°x90°	00 On/Off	0040 -0°C=40°C	05Y 5 Years	0000 No modification
	2 2		023 23W							D0 DALI			
	3 3		027 27W										
	4 4		030 30W										
	5 5		034 34W										
	6 6		040 40W										

Example product code

SQLIST.11.019.8A4000.1P34.090090.D0.0040.05Y.0000

Photo Gallery

