


SUPERTRUNK LED MT 1.0

Advantages

- Lifetime L80B10 at the level of 100,000 hours
- High luminous efficiency up to 178Lm/W
- Solid aluminum housing
- Quick and easy installation
- Low UGR coefficients

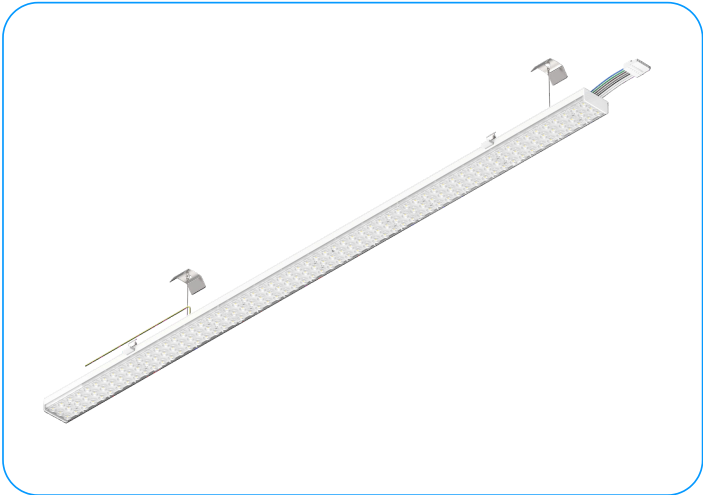

IP20

IK02



SUPERTRUNK LED MT 1.0 1



P



Ra

IP



STR1MT.10.072.8A3000

72

10350 -
11300

3000K

>80

IP20

30°X30° 60°X60° 90°X90°
120°X105°

1,9kg

STR1MT.10.072.8A4000

72

11350 -
12400

4000K

>80

IP20

30°X30° 60°X60° 90°X90°
120°X105°

1,9kg

STR1MT.10.072.8A5000

72

11400 -
12450

5000K


>80

IP20

30°X30° 60°X60° 90°X90°
120°X105°

1,9kg

***Depending on the lens used, the luminous flux output may vary, so the table may show luminous flux ranges for a given power version for illustrative purposes.**

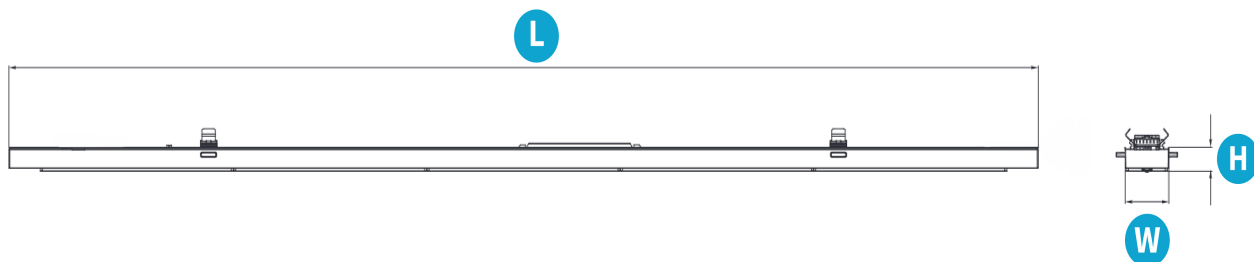

H

W

L

STR1MT.1	32	65	1528
----------	----	----	------

STR1MP.1	32	65	1500
----------	----	----	------

STR1ZT.1	32	65	1500
----------	----	----	------

STR1TE.1	32	65	1475
----------	----	----	------


STR1SM.1	32	65	1495
----------	----	----	------

STR1RS.1	32	65	1531
----------	----	----	------

STR1PM.1	32	65	1479
----------	----	----	------

STR1RV.1	32	65	1485
----------	----	----	------


Montage

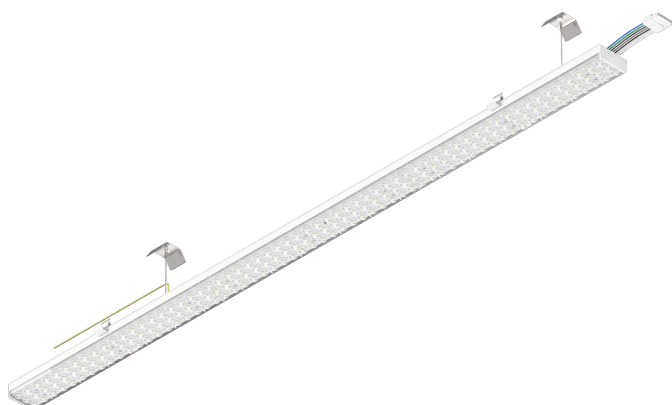


Suspended




Luminous flux

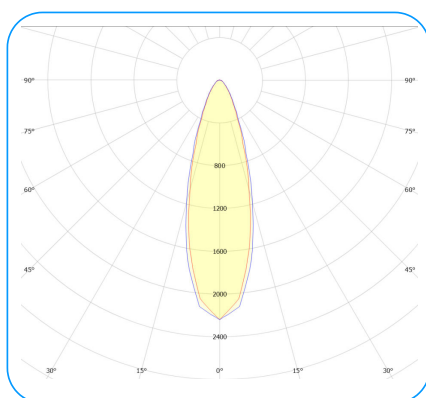


30°X30°

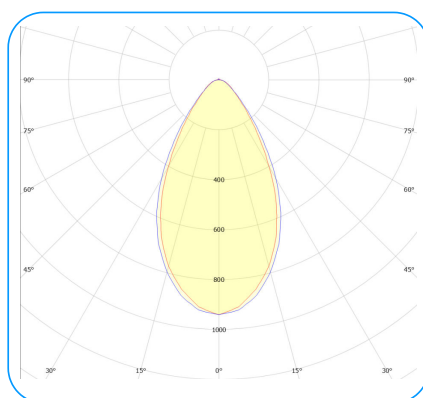

60°X60°

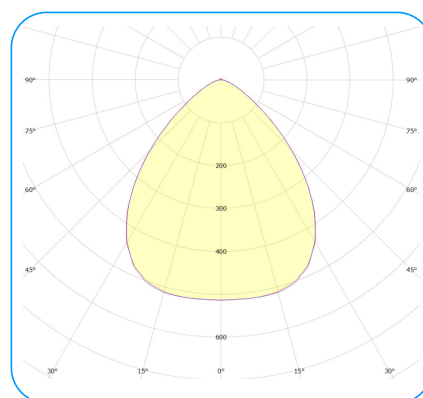

90°X90°

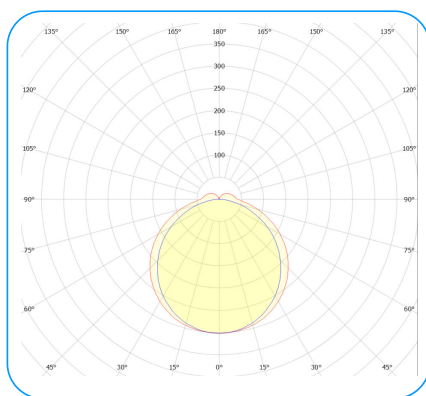

120°X105°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
STRIMP SUPERTRUNK LED MT 1.0	1 1	0 Standard	072 72W	8 >80	A Mid Power	3000 3000K	0 No lens	000	030030 30°x30°	00 On/Off	2040 -20°C÷+40°C	05Y 5 Years	0000 No modification
STR1MT SUPERTRUNK LED MT 1.0						4000 4000K	1 PMMA lens	P22 PC diffuser Frosted	060060 60°x60°	D0 DALI			E005 Through-wired; 3-phase supply
STR1PM SUPERTRUNK LED MT 1.0						5000 5000K			065065 65°x65°				
STR1RS SUPERTRUNK LED MT 1.0									075130 75°x130°				
STR1RV SUPERTRUNK LED MT 1.0									090090 90°x90°				
STR1SM SUPERTRUNK LED MT 1.0									110120 110°x120°				
STR1TE SUPERTRUNK LED MT 1.0									120105 120°x105°				
STR1ZT SUPERTRUNK LED MT 1.0													

Example product code

STR1MT.10.072.8A3000.1000.030030.00.2040.05Y.E005

Photo Gallery

