

ULTIMA LED DB 3.0



Advantages

- Protection class at the level of IP65
- High IK10 impact resistance
- Solid aluminum housing
- Branded components
- Warranty up to 10 years



IP65


IK06

CE

ULTIMA LED DB 3.0 1

	P			Ra	IP		
ULT3DB.10.222.8A4000	222	36400	4000K	>80	IP65	65°X60° 95°X90°	11,2kg
ULT3DB.10.222.8A5000	222	36400 - 36450	5000K	>80	IP65	65°X60° 95°X90°	11,2kg
ULT3DB.10.290.8A4000	290	45700	4000K	>80	IP65	65°X60° 95°X90°	11,2kg
ULT3DB.10.290.8A5000	290	45750	5000K	>80	IP65	65°X60° 95°X90°	11,2kg

***Depending on the lens used, the luminous flux output may vary, so the table may show luminous flux ranges for a given power version for illustrative purposes.**

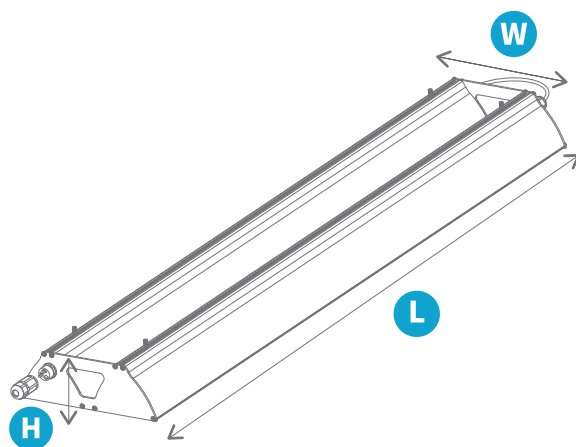

H

W

L

ULT3DB.1

91

270

1375

Montage




Surface mounting




Suspended



Luminous flux

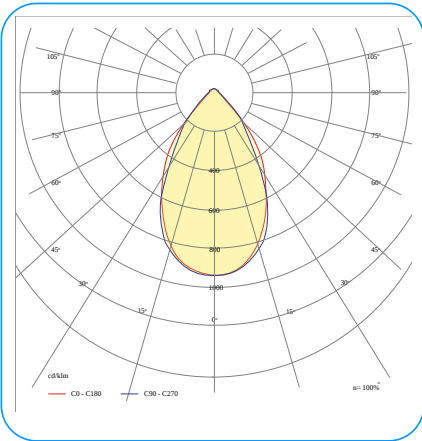

65°X60°

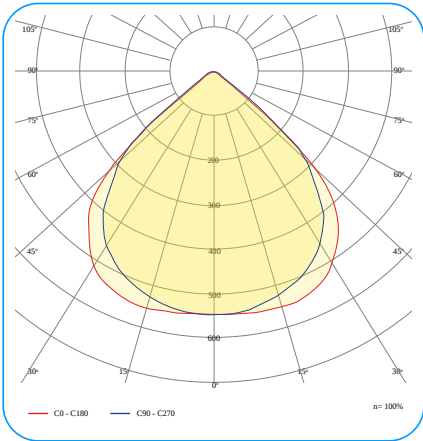

95°X90°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
ULT3DB ULTIMA LED DB 3.0	1 1	0 Standard	222 222W	8 >80	A Mid Power	4000 4000K	1 PMMA lens	G11 Tempered glass Transparent	065060 65°x60°	00 On/Off	2540 -25°C÷+40°C	05Y 5 Years	0000 No modification
			290 290W			5000 5000K		P11 PMMA diffuser Transparent	095090 95°x90°	D0 DALI	2545 -25°C÷+45°C	08Y 8 Years	
											3545 -35°C÷+45°C	10Y 10 Years	
											3550 -35°C÷+50°C		

Example product code

ULT3DB.10.222.8A5000.1G11.065060.00.2545.10Y.0000