


ULTRA LED 1.0

Advantages

- High luminous efficiency up to 197lm/W
- High IK10 impact resistance
- High protection class IP66
- Solid aluminum housing
- Warranty up to 10 years
- Low UGR coefficients

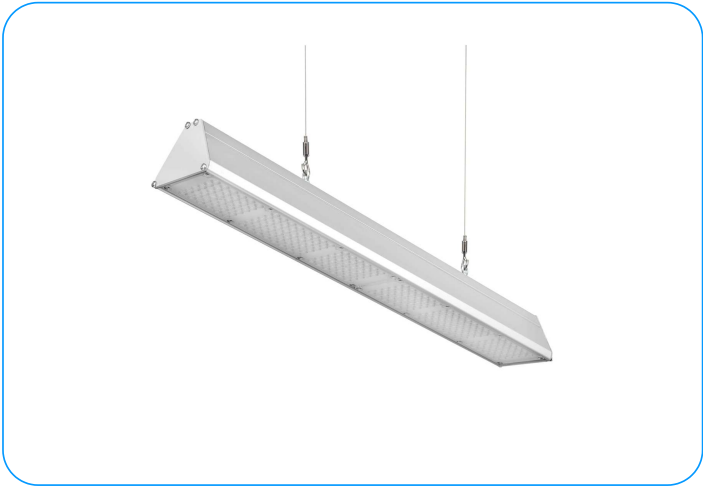

IP66

IK10



ULTRA LED 1.0 1

	P			Ra	IP		
UTR1ST.10.035.8A3000	35	5850 - 6200	3000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	1,4kg
UTR1ST.10.035.8A4000	35	6050 - 6400	4000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	1,4kg
UTR1ST.10.035.8A5000	35	6100 - 6450	5000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	1,4kg

ULTRA LED 1.0 2

	P			Ra	IP		
UTR1ST.20.051.8A3000	51	8900 - 9450	3000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	2,4kg
UTR1ST.20.051.8A4000	51	9200 - 9750	4000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	2,4kg
UTR1ST.20.051.8A5000	51	9250 - 9800	5000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	2,4kg

ULTRA LED 1.0 3

	P			Ra	IP		
UTR1ST.30.069.8A3000	69	11700 - 12450	3000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	2,4kg
UTR1ST.30.069.8A4000	69	12100 - 12850	4000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	2,4kg
UTR1ST.30.069.8A5000	69	12150 - 12900	5000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	2,4kg

ULTRA LED 1.0 4

	P			Ra	IP		
UTR1ST.40.084.8A3000	84	14800 - 15750	3000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	3,4kg
UTR1ST.40.084.8A4000	84	15300 - 16250	4000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	3,4kg
UTR1ST.40.084.8A5000	84	15350 - 16300	5000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	3,4kg

ULTRA LED 1.0 5

	P			Ra	IP		
UTR1ST.50.103.8A3000	103	17850 - 19000	3000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	3,4kg
UTR1ST.50.103.8A4000	103	18450 - 19600	4000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	3,4kg
UTR1ST.50.103.8A5000	103	18500 - 19650	5000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	3,4kg

ULTRA LED 1.0 6

	P			Ra	IP		
UTR1ST.60.117.8A3000	117	20950 - 22300	3000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	4,4kg
UTR1ST.60.117.8A4000	117	21700 - 23050	4000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	4,4kg

UTR1ST.60.117.8A5000	117	21750 - 23100	5000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	4,4kg
----------------------	-----	---------------	-------	-----	------	---	-------

ULTRA LED 1.0 7

	P			Ra	IP		
UTR1ST.70.135.8A3000	135	23600 - 25100	3000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	4,4kg
UTR1ST.70.135.8A4000	135	24450 - 25950	4000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	4,4kg

UTR1ST.70.135.8A5000	135	24500 - 26000	5000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	4,4kg
----------------------	-----	---------------	-------	-----	------	---	-------

ULTRA LED 1.0 8


	P			Ra	IP		
UTR1ST.80.154.8A3000	154	26500 - 28150	3000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	4,4kg
UTR1ST.80.154.8A4000	154	27400 - 29100	4000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	4,4kg

UTR1ST.80.154.8A5000	154	27450 - 29150	5000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	4,4kg
----------------------	-----	---------------	-------	-----	------	---	-------

UTR1ST.80.173.8A3000	173	29300 - 31150	3000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	4,4kg
----------------------	-----	---------------	-------	-----	------	---	-------


UTR1ST.80.173.8A4000	173	30300 - 32200	4000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	4,4kg
UTR1ST.80.173.8A5000	173	30350 - 32250	5000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	4,4kg
UTR1ST.80.193.8A3000	193	32250 - 34250	3000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	4,4kg
UTR1ST.80.193.8A4000	193	33350 - 35400	4000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	4,4kg
UTR1ST.80.193.8A5000	193	33400 - 35450	5000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	4,4kg
UTR1ST.80.210.8A3000	210	34350 - 36500	3000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	4,4kg
UTR1ST.80.210.8A4000	210	35500 - 37700	4000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	4,4kg
UTR1ST.80.210.8A5000	210	35550 - 37750	5000K	>80	IP66	30°X50° 50°X50° 70°X70° 80°X80° 85°X85°	4,4kg

***Depending on the lens used, the luminous flux output may vary, so the table may show luminous flux ranges for a given power version for illustrative purposes.**

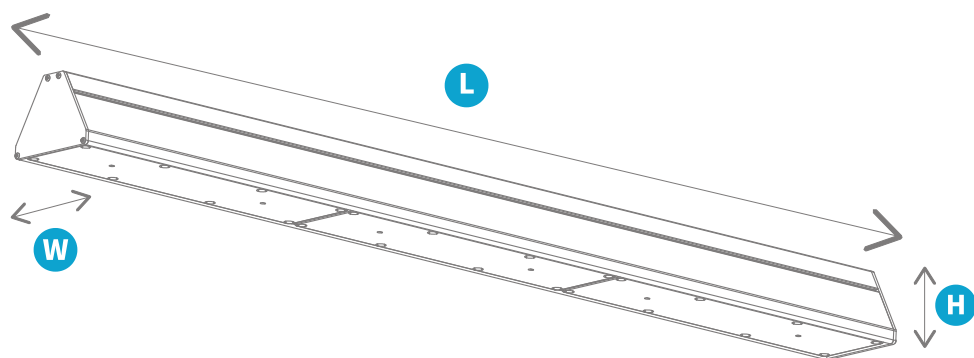

	H	W	L
UTR1ST.1	74	98	331
UTR1ST.2	74	98	652
UTR1ST.3	74	98	652
UTR1ST.4	74	98	975
UTR1ST.5	74	98	975
UTR1ST.6	74	98	1296
UTR1ST.7	74	98	1296
UTR1ST.8	74	98	1296

Montage

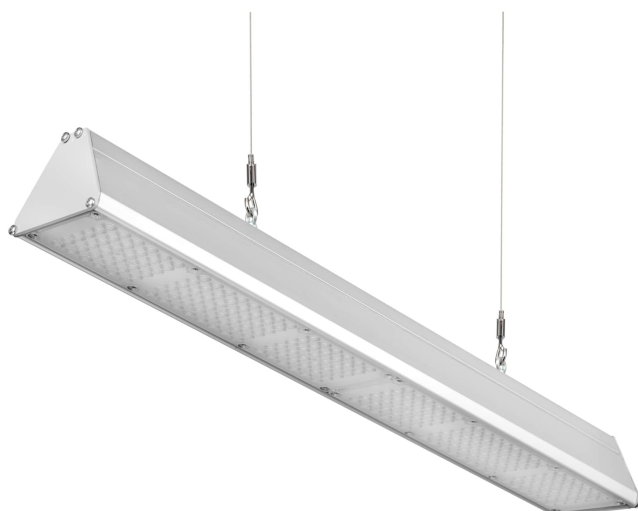


Surface mounting




Suspended




Luminous flux

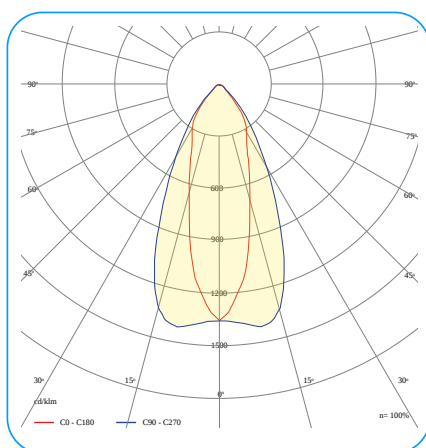


30°X50°

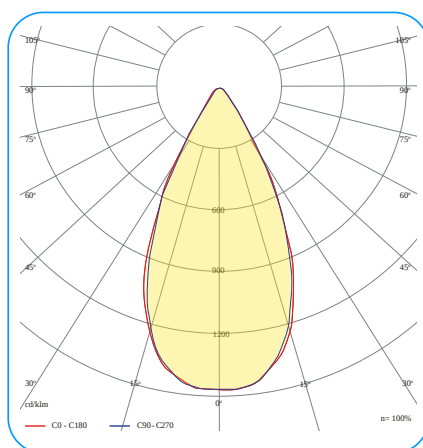


50°X50°

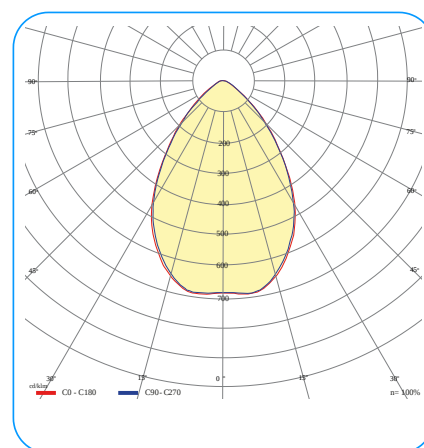

70°X70°

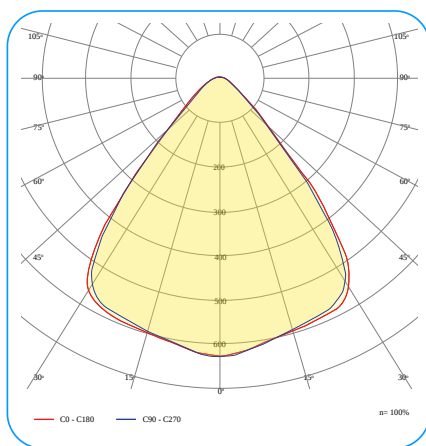

80°X80°

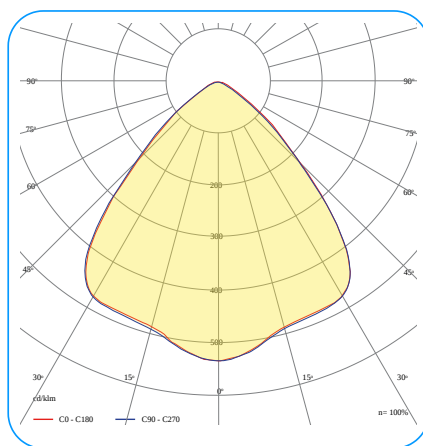

85°X85°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
UTR1ST ULTRA LED 1.0	1 1	0 Standard	035 35W	8 >80	A Mid Power	3000 3000K	2 PC lens	000	030050 30°x50°	00 On/Off	2540 -25°C+40°C	05Y 5 Years	0000 No modification
	2 2		051 51W			4000 4000K			050050 50°x50°	D0 DALI	2545 -25°C+45°C	08Y 8 Years	
	3 3		069 69W			5000 5000K			070070 70°x70°		2550 -25°C+50°C	10Y 10 Years	
	4 4		084 84W						080080 80°x80°		3545 -35°C+45°C		
	5 5		103 103W						085085 85°x85°		3550 -35°C+50°C		
	6 6		117 117W								3555 -35°C+55°C		
	7 7		135 135W								3560 -35°C+60°C		
	8 8		154 154W										
			173 173W										
			193 193W										
			210 210W										

Example product code

UTR1ST.10.035.8A3000.2000.030050.D0.2545.05Y.0000