


ULTRA LED 1.1

Advantages

- High luminous efficiency up to 191Lm/W
- High IK10 impact resistance
- High protection class IP66
- Solid aluminum housing
- Warranty up to 10 years
- Low UGR coefficients

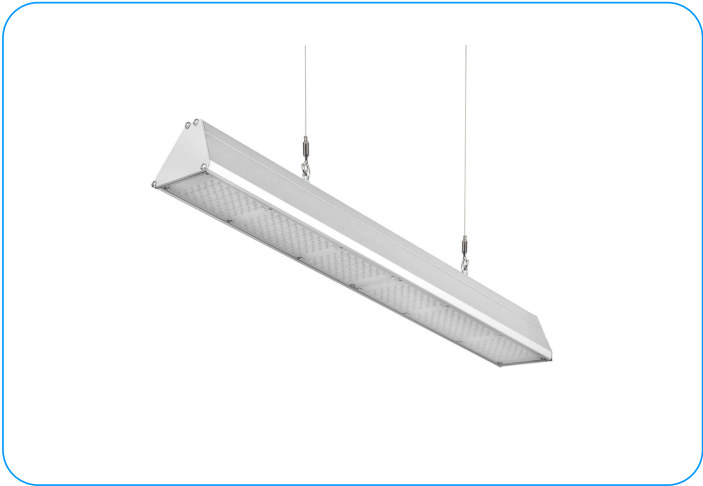

IP66

IK10



ULTRA LED 1.1 1

	P			Ra	IP		
UTRIST.11.036.8A3000	36	5950 - 6050	3000K	>80	IP66	40°X40° 75°X75°	1,4kg
UTRIST.11.036.8A4000	36	6300 - 6400	4000K	>80	IP66	40°X40° 75°X75°	1,4kg
UTRIST.11.036.8A5000	36	6350 - 6450	5000K	>80	IP66	40°X40° 75°X75°	1,4kg

ULTRA LED 1.1 2

	P			Ra	IP		
UTRIST.21.052.8A3000	52	9150 - 9250	3000K	>80	IP66	40°X40° 75°X75°	2,4kg
UTRIST.21.052.8A4000	52	9700 - 9800	4000K	>80	IP66	40°X40° 75°X75°	2,4kg
UTRIST.21.052.8A5000	52	9750 - 9850	5000K	>80	IP66	40°X40° 75°X75°	2,4kg

ULTRA LED 1.1 3

	P			Ra	IP		
UTR1ST.31.069.8A3000	69	11950 - 12100	3000K	>80	IP66	40°X40° 75°X75°	2,4kg
UTR1ST.31.069.8A4000	69	12650 - 12800	4000K	>80	IP66	40°X40° 75°X75°	2,4kg
UTR1ST.31.069.8A5000	69	12700 - 12850	5000K	>80	IP66	40°X40° 75°X75°	2,4kg

ULTRA LED 1.1 4

	P			Ra	IP		
UTR1ST.41.085.8A3000	85	15100 - 15250	3000K	>80	IP66	40°X40° 75°X75°	3,4kg
UTR1ST.41.085.8A4000	85	16000 - 16150	4000K	>80	IP66	40°X40° 75°X75°	3,4kg
UTR1ST.41.085.8A5000	85	16050 - 16200	5000K	>80	IP66	40°X40° 75°X75°	3,4kg

ULTRA LED 1.1 5

	P			Ra	IP		
UTR1ST.51.094.8A3000	94	16650 - 16800	3000K	>80	IP66	40°X40° 75°X75°	3,4kg
UTR1ST.51.094.8A4000	94	17600 - 17750	4000K	>80	IP66	40°X40° 75°X75°	3,4kg
UTR1ST.51.094.8A5000	94	17650 - 17800	5000K	>80	IP66	40°X40° 75°X75°	3,4kg

ULTRA LED 1.1 6

	P			Ra	IP		
UTR1ST.61.102.8A3000	102	17950 - 18150	3000K	>80	IP66	40°X40° 75°X75°	3,4kg

UTR1ST.61.102.8A4000	102	19000 - 19200	4000K	>80	IP66	40°X40° 75°X75°	3,4kg
UTR1ST.61.102.8A5000	102	19050 - 19250	5000K	>80	IP66	40°X40° 75°X75°	3,4kg

ULTRA LED 1.1 7

	P			Ra	IP		
UTR1ST.71.112.8A3000	112	20050 - 20250	3000K	>80	IP66	40°X40° 75°X75°	4,4kg
UTR1ST.71.112.8A4000	112	21200 - 21450	4000K	>80	IP66	40°X40° 75°X75°	4,4kg
UTR1ST.71.112.8A5000	112	21250 - 21500	5000K	>80	IP66	40°X40° 75°X75°	4,4kg

ULTRA LED 1.1 8


	P			Ra	IP		
UTR1ST.81.136.8A3000	136	23950 - 24200	3000K	>80	IP66	40°X40° 75°X75°	4,4kg
UTR1ST.81.136.8A4000	136	25350 - 25600	4000K	>80	IP66	40°X40° 75°X75°	4,4kg
UTR1ST.81.136.8A5000	136	25400 - 25650	5000K	>80	IP66	40°X40° 75°X75°	4,4kg

ULTRA LED 1.1 9

	P			Ra	IP		
UTR1ST.91.159.8A3000	159	27400 - 27700	3000K	>80	IP66	40°X40° 75°X75°	4,4kg
UTR1ST.91.159.8A4000	159	29000 - 29350	4000K	>80	IP66	40°X40° 75°X75°	4,4kg
UTR1ST.91.159.8A5000	159	29050 - 29400	5000K	>80	IP66	40°X40° 75°X75°	4,4kg
UTR1ST.91.182.8A3000	182	31250 - 31550	3000K	>80	IP66	40°X40° 75°X75°	4,4kg

UTR1ST.91.182.8A4000	182	33050 - 33400	4000K	>80	IP66	40°X40° 75°X75°	4,4kg
UTR1ST.91.182.8A5000	182	33100 - 33450	5000K	>80	IP66	40°X40° 75°X75°	4,4kg
UTR1ST.91.207.8A3000	207	34950 - 35350	3000K	>80	IP66	40°X40° 75°X75°	4,4kg
UTR1ST.91.207.8A4000	207	37000 - 37400	4000K	>80	IP66	40°X40° 75°X75°	4,4kg
UTR1ST.91.207.8A5000	207	37050 - 37450	5000K	>80	IP66	40°X40° 75°X75°	4,4kg

***Depending on the lens used, the luminous flux output may vary, so the table may show luminous flux ranges for a given power version for illustrative purposes.**

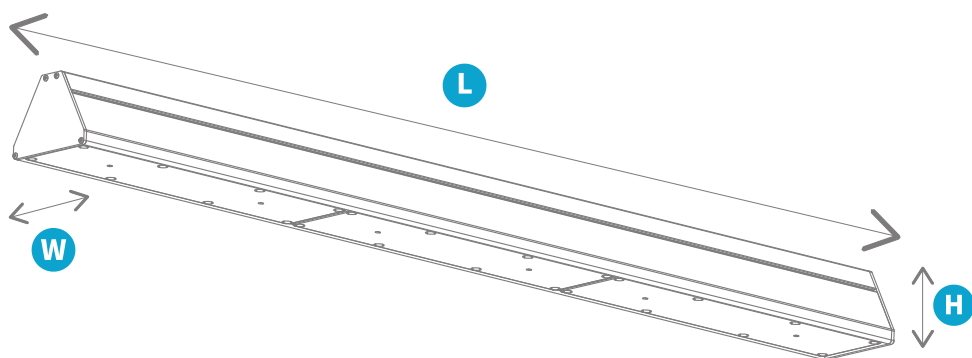

	H	W	L
UTR1ST.1	74	98	331
UTR1ST.2	74	98	652
UTR1ST.3	74	98	652
UTR1ST.4	74	98	975
UTR1ST.5	74	98	975
UTR1ST.6	74	98	975
UTR1ST.7	74	98	1296
UTR1ST.8	74	98	1296
UTR1ST.9	74	98	1296

Montage





Surface mounting







Suspended



Luminous flux

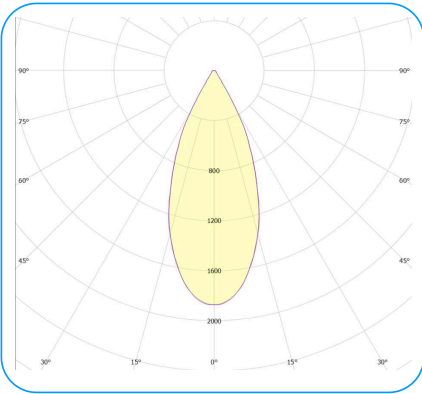

40°X40°

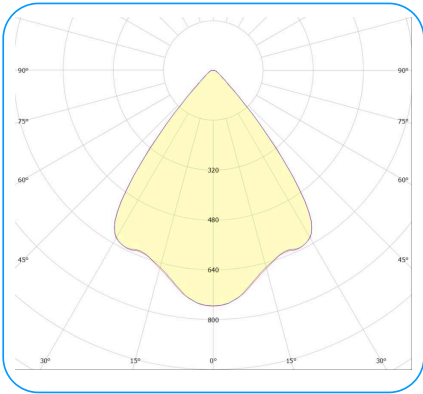

75°X75°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
UTR1ST ULTRA LED 1.1	1 1	1 Lift 1	036 36W	8 >80	A Mid Power	3000 3000K	2 PC lens	000	040040 40°x40°	00 On/Off	2540 -25°C÷40°C	05Y 5 Years	0000 No modification
	2 2		052 52W			4000 4000K			075075 75°x75°	D0 DALI	2545 -25°C÷45°C	08Y 8 Years	
	3 3		069 69W			5000 5000K					2550 -25°C÷50°C	10Y 10 Years	
	4 4		085 85W								3545 -35°C÷45°C		
	5 5		094 94W								3550 -35°C÷50°C		
	6 6		102 102W								3555 -35°C÷55°C		
	7 7		112 112W								3560 -35°C÷60°C		
	8 8		136 136W										
	9 9		159 159W										
			182 182W										
			207 207W										

Example product code

UTR1ST.11.036.8A3000.2000.040040.00.2545.05Y.0000