

Variolux LED MultiPower 1.0



Advantages

- High protection class IP66
- High IK10 impact resistance
- Solid aluminum housing
- High luminous flux


IP66

IK10



Variolux LED MultiPower 1.0 1

NAME	PRODUCT CODE	POWER [W]	LUM. FLUX [lm]	EFFICACY [lm/W]	CCT [K]	CRI	IP	BEAM ANGLES
Variolux LED 1.0	VAR1MP.10.200.8M4000	100	17100	171	4000K	>80	IP66	60°, 90°, 110°
		150	26100	174				
		200	35100	176				

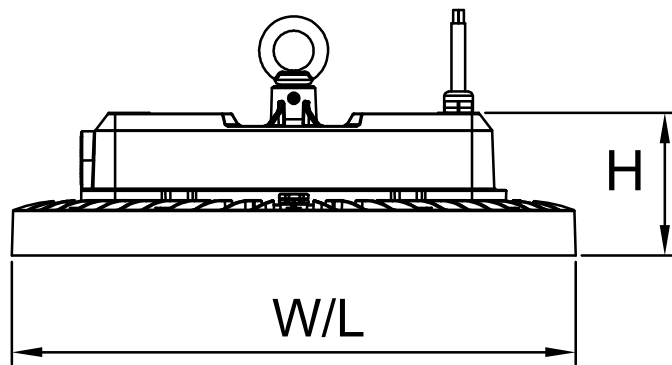


VARIMP.1

130


330

330


Montage

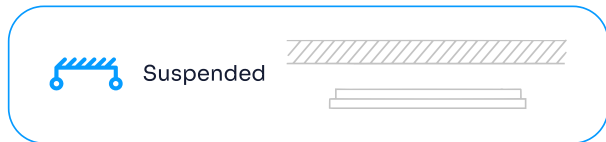


Luminous flux

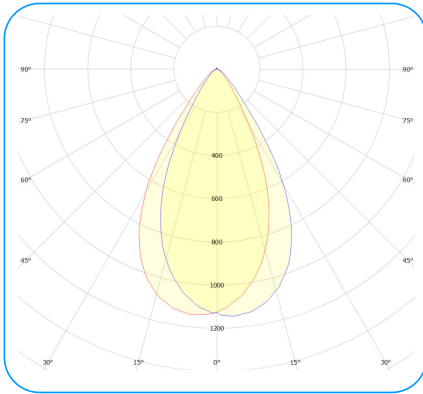

60°X60°

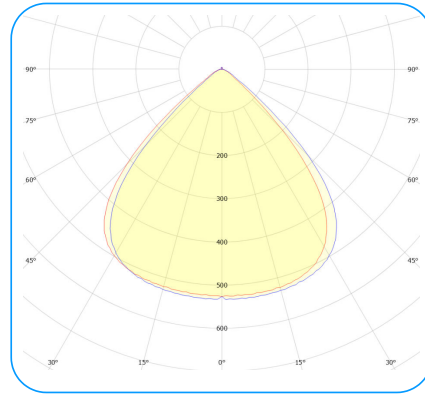

90°X90°

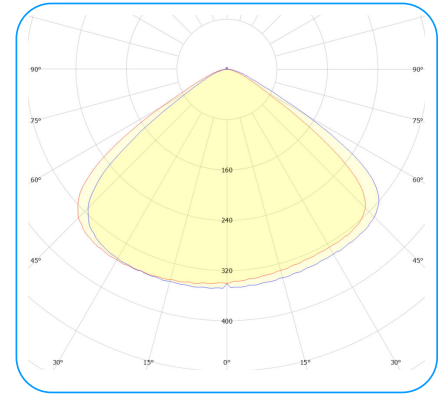

110°X110°

Available configurations

Family	Power version	Version	Power [W]	CRI	Type of diode	CCT [K]	Lens material	Diffuser material	Beam angle	Control	Operating temperature	Warranty	Modifications
VAR1MP Variolux LED MultiPower 1.0	1 1	0 Standard	200 100/150/200W	8 >80	M Highpower 5050	4000 4000K	2 PC lens	000	060060 60°x60°	00 On/Off	4050 -40°C:+50°C	05Y 5 Years	0000 No modification
									090090 90°x90°				
									110110 110°x110°				

Example product code

VAR1MP.10.200.8M4000.2000.060060.00.4050.05Y.0000

Photo Gallery

